



Pin 1	DMX-
Pin 2	DMX+
Pin 3	GND


1

Cable OD: Ø3 — 6mm
Strip CAT5 cable (coating remain)
Outdoor cable specification:
CAT-5e UTP/FTP
PVC jacket; UV resistant
Outer diameter 3-6mm, filled type
(The warranty will void if in use cable is not follow the specification of outdoor cable)


2

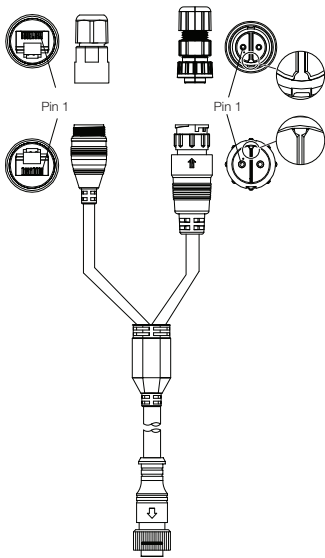
Run cable through connector


3

Crimp connector onto cable
Tighten Sealing Nut temporary



Pin 1

Pin 1




Pin 1	V+
Pin 2	V-


1

Cable OD: Ø8 — 10mm
Cable type: H07RN-F 2 X 1.5 mm sq


2

Run cable through connector
Tightening Torque: 0.6 — 0.8Nm
Tighten cable onto screw terminals



3

Tightening Torque: 0.7 — 0.9Nm
Tighten Clamp Ring



AS DOT POWER INJ CABLE KIT TX (AM324870055)

Pin 1	V+
Pin 2	V-


1

Cable OD: Ø8 — 10mm
Cable type: H07RN-F 2 X 1.5 mm sq


2

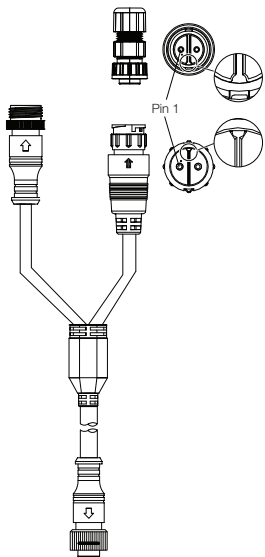
Run cable through connector
Tightening Torque: 0.6 — 0.8Nm
Tighten cable onto screw terminals


3


Tightening Torque: 0.7 — 0.9Nm
Tighten Clamp Ring


Pin 1


Pin 1




4

Plug RJ45 until "click" sound is heard



5

Tightening Torque: 0.7 — 0.9Nm
Tighten Clamp Ring



6

Tightening Torque: 0.7 — 0.9Nm
Tighten Sealing Nut



4

Tightening Torque: 0.7 — 0.9Nm
Tighten Sealing Nut



5

Push both connectors onto each other



6

Turn Lock Nut clockwise for half cycle to lock



4

Tightening Torque: 0.7 — 0.9Nm
Tighten Sealing Nut


5

Push both connectors onto each other


6

Turn Lock Nut clockwise for half cycle to lock


Assembly Guide

V1.0

TRAXON

Assembly Guide

V1.0

TRAXON