www.traxon-ecue.com





- System efficacy up to 140lm/W
- Lumen output from 2,500lm to 8,400lm
- Durable dual extrusion PC
- 50,000hrs lifetime
- IP65, IK08 rated

Light is sustainable LEDCOMFO[®] Waterproof General Edition

Flexible, sustainable, and easily maintainable solution with slim profile for humid and dusty environments.









LEDCOMFO® Waterproof (General Edition)



LEDCOMFO® Waterproof series is a robust luminaire suitable for humid and dusty environments. LED technology

offers excellent energy-saving comparing to traditional fluorescent tubes. LEDCOMFO®

Waterproof series is an

ideal choice to replace conventional waterproof.

Advantages & Benefits

Unique prismatic lens

- 4 wattage ranges
- Lumen output from 2,500lm to 8,400lm
- Color temperature

Dimensions

- 3000K/4000K/5700K/6500K
- ON/OFF and DALI version

Robust and reliable

- 50,000hrs lifetime
- IP65, IK08 rated


Safe and efficient

- System efficacy up to 140lm/W
- Durable dual extrusion PC

Applications

- Factories
- Warehouse
- Underpasses
- Car parks

Photometrics

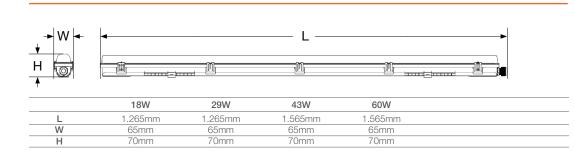



Product Configurator

LCM WP Powe	r CRI - CCT	Dimension	Control	Packing Quantity					
Power		CRI - CCT		Dimension	Contro	Control		Packing Quantity	
18W 18W - 2500	m - 1265 X 65 X70	830	Ra80, 3000K	L1200 1265 X 65 X 70	Blank	ON/OFF	VS9	9PCS - 1265 X 65 X70	
29W - 4000	m - 1265 X 65 X70	840	Ra80, 4000K	L1500 1565 X 65 X 70	DA	DALI	VS9	9PCS - 1565 X 65 X70	
43W - 60001	m - 1565 X 65 X70	857	Ra80, 5700K						
60W - 8400I	m - 1565 X 65 X70	865	Ra80, 6500K						
Voltage	Frequency	Be	eam angle	Mounting					
220-240V AC	50/60 Hz	12	0°	Surface / Suspended					

v1.0 07/23 · Technical data subject to variation and change without notice.

©2023 Traxon Technologies. All rights reserved. Errors and omission excepted. All images used are for illustrative purposes only and not intended to reflect actual product performance. Official authorized licensee of the OSRAM trademark.

Traxon e:cue Sales enquiry: info@traxon-ecue.com www.traxon-ecue.com