

WARNING / 警告：

1. Ensure that any installation and maintenance be performed by a qualified electrician (Terminal block not included) and the luminaire is wired in accordance with the latest IEE electrical regulations or the local equipments. Ensure that the power supply is off before starting installation and maintenance. Do not switch on until the installation or maintenance is completed. 安装和维护仅由专业人员完成 (不包括接线端子) , 且接线符合IEE电器规范或国家标准。安装和维护前, 请关闭电源, 安装和维护中, 切勿通电。 安装和维护仅由專業人員完成 (不包括接線端子) , 且接線符合IEE電器規範或 國家標準。安裝和維護前, 請關閉電源; 安裝和維護中, 切勿通電。
- 2.If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. 如果此灯具的外部软缆或软线损坏了, 该线要由制造商或其服务代理商或有类似资格的人更换, 以避免发生危险。灯具光源须由制造商或其服务代理商或有资质的人进行替换。 如果此燈具的外部軟纜或軟線損壞了, 該線要由製造商或其服務代理商或有類似資格的人更換, 以避免發生危險。燈具光源須由製造商或其服務代理商或有資質的人進行替換。
3. Ensure that the luminaire be installed under canopy when used in outdoor. Not suitable for LED tube lamps. 灯具户外使用请务必安装于道挡物下。LED灯管不适用于此灯具。 燈具戶外使用請務必安裝於道擋物下。LED 燈管不適用於此燈具。
4. Insulation information: 绝缘信息: 絕緣信息:
- 1). Reinforced insulation is maintained between live prats (L/N) and output circuit (SELV parts); 带电部分 (L/N) 和输出电路 (SELV部分) 之间已满足加强绝缘; 帶電部分 (L/N) 和輸出電路 (SELV部分) 之間已滿足加強絕緣;
- 2). Basic insulation is maintained between live parts (L/N) and DALI dimming circuit (FELV parts); 带电部分 (L/N) 和DALI调光电路 (FELV部分) 之间已满足基本绝缘; 帶電部分 (L/N) 和DALI調光電路 (FELV部分) 之間已滿足基本絕緣;
- 3). Supplementary insulation is maintained between DALI dimming circuit (FELV parts) and DALI调光电路 (FELV 部分) 和输出电路 (SELV 部分) 已满足附加绝缘; DALI調光電路 (FELV 部分) 和輸出電路 (SELV 部分) 已滿足附加絕緣;

Conformance to:

执行标准

GB7000.1 灯具 第1部分: 一般安全要求与试验

GB7000.201 灯具 第2-1部分: 特殊要求固定式通用灯具

GB17743电气照明和类似设备的无线电骚扰特性的限值和测量方法

GB17625.1 (>25W) 电磁兼容限值谐波电流发射限值(设备每相输入电流≤16A)

OSRAM CHINA LIGHTING LTD.
No. 1 North Industrial Road, Foshan, Guangdong. Postal code: 528000
欧司朗 (中国) 照明有限公司
广东省佛山市工业北路1号 邮编: 528000
客服热线: 400 882 1836
www.osram.com.cn

OSRAM Lighting Pte Ltd
988 Toa Payoh North
03-01 / 07 / 08
Singapore 319002
www.osram.com

OSRAM Lighting Private Ltd.
1st Floor, IFFCO, Surinder Jhakhar Bhavan,
Plot No. 3, Sector-32, Gurgaon-122001,
Haryana, India
Consumer care cell (Address as per above)
Toll free number: 18004190426
E-mail id: customercare@osram.com
www.osram.com

Traxon Technologies Ltd.
213 Wireless Centre,
3 Science Park East Avenue,
Science Park, Shatin, New Territories,
Hong Kong
Phone: +852 2943 3488
www.osram.com


OSRAM (MALAYSIA) SDN BHD
PT207, Level4, Uptown.7,
Jalan SS21/39, Damansara Utama,
47400 Petaling Jaya, Selangor,
Malaysia
www.osram.com

PT. OSRAM Indonesia,
Cowell Tower Lt.8,
Jl. Senen Raya No. 135 Senen,
Jakarta Pusat 10410 Indonesia
www.osram.com

주식회사 오스람
서울시 강남구 삼성로 554 예성빌딩 3층 (06165)
AS: 080 349 0365
www.osram.kr

บริษัท ออสม (ประเทศไทย) จำกัด
เลขที่ 57 อาคารปารคเวนเชอร์ อีโคโนมิกซ์
ชั้น 18 ยูนิค 1808 - 1809
ถนนวิภาวดี แขวงจตุจักร เขตปทุมวัน
กรุงเทพมหานคร 10330
www.osram.com


OSRAM GmbH
Karl-Schurz-Strasse 38
33100 Paderborn
Germany
www.osram.com



CE mark and RoHS compliance logo.

www.osram.com

Simplitz® Waterproof V2
绚丽三防支架二代
絢麗三防支架二代

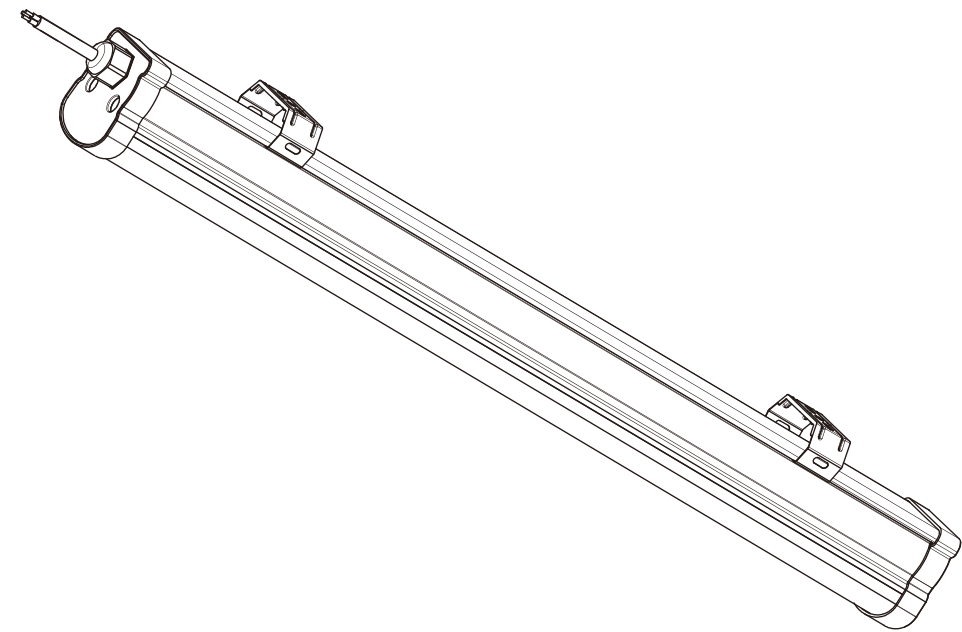


- Please read instruction carefully before assembling and installation
在您组装产品前请仔细阅读本说明书
在您組裝產品前請仔細閱讀本說明書
- Please keep instruction as reference in the future
请您保留本说明书作为日后参考
請您保留本說明書作為日後參考

OSRAM

Simplitz®Waterproof V2 / 绚丽三防支架二代 / 絢麗三防支架二代


	SIM WP V2 17W 8XX L1200 WH 8XX L1200 DA WH	SIM WP V2 33W 8XX L1200 WH 8XX L1200 DA WH	SIM WP V2 28W 8XX L1500 WH 8XX L1500 DA WH	SIM WP V2 50W 8XX L1500 WH 8XX L1500 DA WH
Dimensions (L x W x H)	1188 x 64 x 66 mm	1188 x 64 x 66 mm	1468 x 64 x 66 mm	1468 x 64 x 66 mm
Wattage(W)	17W	33W	28W	50W
Voltage(V)	220-240V	220-240V	220-240V	220-240V
Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Weight (on/off)	0.9 kg	0.9 kg	1.04 kg	1.04 kg
Weight (DALI)	1.03 kg	1.03 kg	1.19 kg	1.25 kg
IP	IP65	IP65	IP65	IP65
Ta	-20 ~ 40°C	-20 ~ 40°C	-20 ~ 40°C	-20 ~ 40°C
PF	>0.9	>0.9	>0.9	>0.9

'XX' representative CCT,can be 40, 57, 65; 65=6500K, 40=4000K, 57=5700K

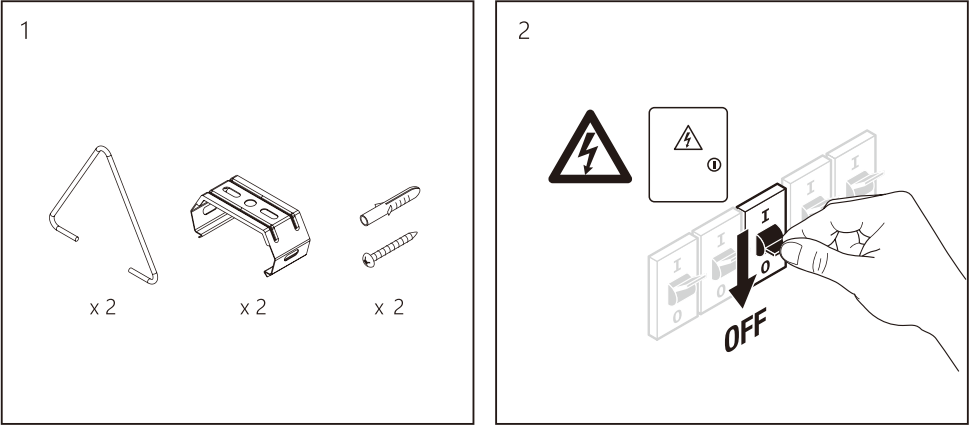

2

Simplitz®Waterproof V2 / 绚丽三防支架二代 / 絢麗三防支架二代

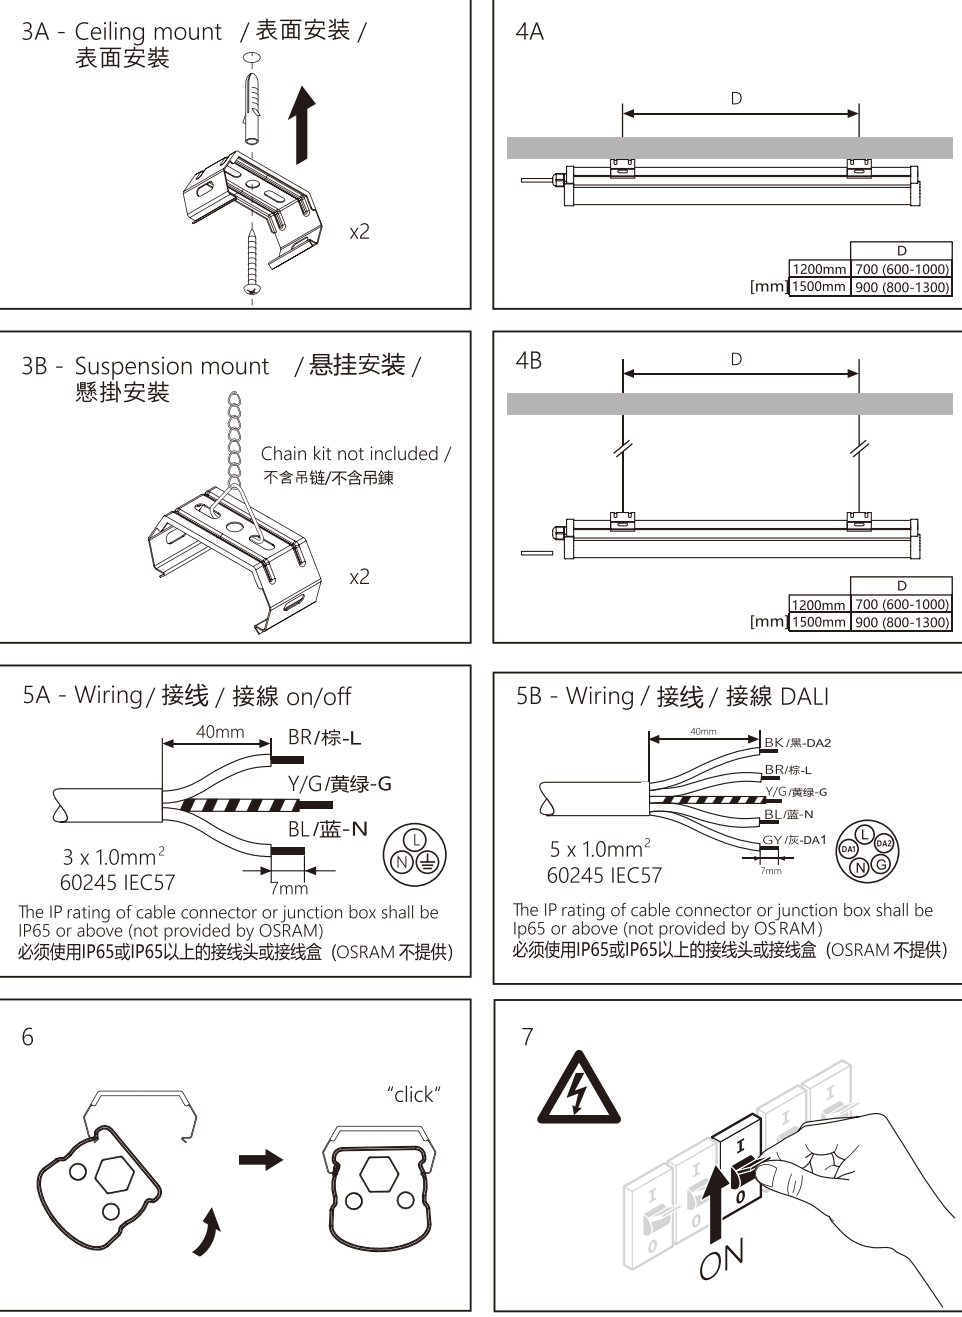

3