TRAXON Plus+

Linear Plus RGBW Quad

Project: _____

Type: _____



IP66 COAST DMX/RDM ANSI 3G IK08


The Traxon Linear Plus is an AC powered, high-brightness outdoor luminaire that seamlessly integrates into any architectural, residential, or commercial setting. Featuring a choice of DMX/RDM and 0-10V control, RGBW (Quad and Discrete), DW and White color options and intelligent control personalities, allowing seamless Linear grazing and washing effects.
This product is intended for use in high-quality colored light applications.

Features


- DMX / RDM control
- Easy installation and maintenance
- Dynamic Boost
- Assortment of optical and installation accessories

Dimensions

Unit: mm [inches]

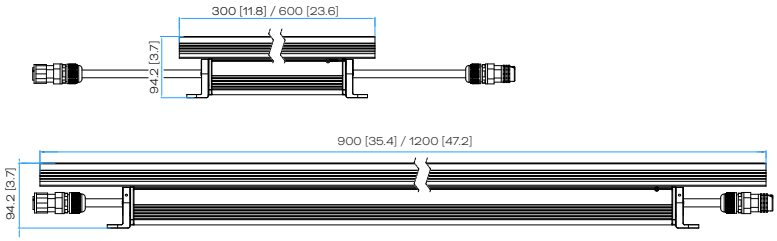

Panel Mount Output Version
Unit: mm [inches]




Technologies

- Auto-Addressing / Manual Addressing
- Dynamic Boost

Color Options



Beam Angles

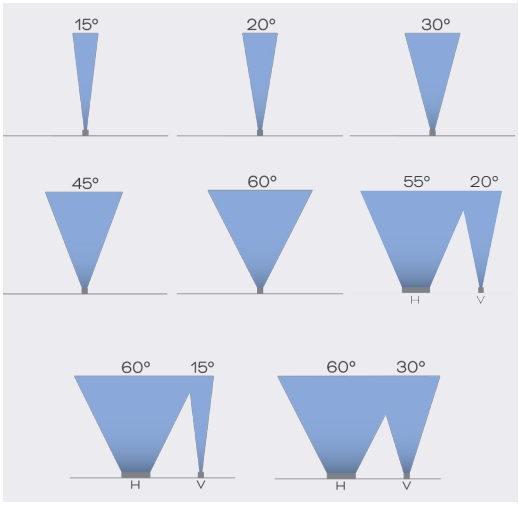

Finish



©2026 TRAXON TECHNOLOGIES. ALL RIGHTS RESERVED.

Linear Plus RGBW Quad

Specifications

Product Specifications

	RGBW Quad (Q) LED			
Length Option	300mm [1ft]	600mm [2ft]	900mm [3ft]	1200mm [4ft]
Pixels	1	2 (1 pixel is on demand)	3 (1 pixel is on demand)	4 (1 / 2 pixel is on demand)
Color Range	RGBW (W=4000K); RGBW (W=3000K) is on demand Dominant wavelength: Red: 625nm / Green: 525nm / Blue: 460nm			
Color Resolution	16-Bit Grayscale, Gamma 2.2			
Refresh Rate	12kHz			
LED Quantity	RGBW Quad (Q) LED 5pcs	RGBW Quad (Q) LED 10pcs	RGBW Quad (Q) LED 15pcs	RGBW Quad (Q) LED 20pcs
Beam Angle	15°, 20°, 30°, 45°, 60°, 55° x 20°, 60° x 15°, 60 ° x 30°			
Luminous Flux (White Balance Mode)	15W: 1125 lm (15° W4000K Full On)	30W: 2250 lm (15° W4000K Full On)	45W: 3600 lm (15° W4000K Full On)	60W: 4800 lm (15° W4000K Full On)
Efficacy (White Balance Mode)	15W: 75 lm/W (15° W4000K Full On)	30W: 75 lm/W (15° W4000K Full On)	45W: 80 lm/W (15° W4000K Full On)	60W: 80 lm/W (15° W4000K Full On)
CRI	90 CRI by request: 2700K-4000K (CRI90)			
Housing	Powder Coated Extruded Aluminum			
Housing Finish	Standard color: Traxon Signature Gray (RAL7005) Optional color: Gray (RAL7015), Black (RAL9005), White (RAL9003), Custom			
Cover Lens	Tempered glass			
Mounting	Surface Mount Optional mounting accessories are available			
Adjustment Options	-90° to +90° -90° (Panel Mount)			
Dimensions (L x W x H)	300mm x 50mm x 94mm 11.8" x 2" x 3.7"	600mm x 50mm x 94mm 23.6" x 2" x 3.7"	900mm x 50mm x 94mm 35.4" x 2" x 3.7"	1200mm x 50mm x 94mm 47.2" x 2" x 3.7"
Dimensions (Panel Mount) (L x W x H)	300mm x 50mm x 99.5mm 11.8" x 2" x 3.9"	600mm x 50mm x 99.5mm 23.6" x 2" x 3.9"	900mm x 50mm x 99.5mm 35.4" x 2" x 3.9"	1200mm x 50mm x 99.5mm 47.2" x 2" x 3.9"
Weight	1.9kg / 4.2lbs	3.1kg/6.8lbs	4.4kg/9.7lbs	5.6kg / 12.4lbs
Weight (Panel Mount)	1.9kg / 4.2lbs	3.1kg/6.8lbs	4.4kg/9.7lbs	5.6kg / 12.4lbs
EPA	Front: 0.06 sq.ft Side: 0.45 sq.ft	Front: 0.06 sq.ft Side: 0.8 sq.ft	Front: 0.06 sq.ft Side: 0.92 sq.ft	Front: 0.06 sq.ft Side: 1.27 sq.ft
EPA (Panel Mount)	Front: 0.06 sq.ft Side: 0.32 sq.ft	Front: 0.06 sq.ft Side: 0.67 sq.ft	Front: 0.06 sq.ft Side: 1.02 sq.ft	Front: 0.06 sq.ft Side: 1.34 sq.ft
Regulatory Listing & Safety Approval	Electrical Protection Class I, cETLus, FCC, IK08			
Operating Temperature	-40°C* to +50°C / -40°F* to +122°F			
Min. Starting Temperature	-20°C (-4°F)			
Storage Temperature	-40°C to +80°C (-40°F to +176°F)			
Environment	Outdoor (IP66), suitable for coastal environments UL1598A Marine Certified			
Humidity	10-90%, non-condensing			

Electrical Specifications

Operating Voltage	120-277V AC 50 / 60Hz			
Power Consumption (W)	4 / 8 / 12 / 15	8 / 16 / 24 / 30	12 / 24 / 36 / 45	16 / 32 / 48 / 60
Lumen Maintenance	L70 @ 25°C – 100,000 hours			

System Specifications

Power Supply	AC line
Control	DMX/RDM RDM Personalities[1]: RGBW equal current mode, RGBW White balance mode (Default, RGBW40 full on to 6500K), Dynamic boost mode, 16-Bit
Addressing Options	Auto-addressing ON or Auto-addressing OFF

*: Rated operating temperatures are the absolute min/max temperatures meant to be for short periods of time. Not sustained temperatures for extended periods.
1: RDM Personalities
- RGBW Equal Current mode: Each R, G, B, W channel is driven by the same driving current
- RGBW White Balance mode: Each R, G, B, W channel is driven by a modified driving current so that when RGBW is all on, the resulted white is balanced to a defined CCT. In the case of Linear Plus standard RGBW30, when 4 channels are turned on with the same DMX value, the resulted White color is balanced to an approximate 4000K CCT.
- Dynamic Boost mode: In applications where not all channels of a fixture are used, a portion of the unused channels' power would be redirected to the channel(s) that is(are) in used to boost the light output. For a RGBW fixture, depending on whether 1, 2 or 3 channels are in used, the redirected power would vary, and in the case that all 4 channels are used, there will be no boost and act like in the Equal Current model

LED CHARACTERISTICS Because LEDs are semiconductor devices, their performances are subject to inherent variability commonly found in semiconductor industry. To improve consistency in performance across the same product, LED manufacturers "sort" LEDs into bins according to different preset parameters, such as forward driving voltage, illumination, etc. Whereas binning is a sorting function, it is not a correction process. Inherent variability in the manufacturing process results always in different binning distributions according to different production lots. Traxon uses automatically binned LEDs on its products, thereby minimizing output variations within the model range.

As with all electronic devices, LED output degrades over time – a term called lumen depreciation. This also explains why it is nearly impossible to expect photometric performances of two LED products with different service life spans to be the same. The rate of LED degrade is a complicated function of many factors such as operating efficiency, duration of continuous operation, and more significantly, environmental conditions (ambient temperature for example). If allowed working under optimal operating temperature range and with good ventilation, LED devices enjoy long service lives over conventional light sources. When using/installing LED devices, care should be taken to ensure that the devices will operate within the operating conditions specified in respective product literature.

This product contains a light source of energy efficiency class G to Regulation (EU) No 2019/2015.
Lumen measurement compiles with LM-79-08 standard.
Lumen maintenance is calculated based on LM-80 compliant measurement.


©2026 TRAXON TECHNOLOGIES. ALL RIGHTS RESERVED.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ERRORS AND OMISSION EXCEPTED.


Source Specifications

Length Option	300mm [1ft]	600mm [2ft]	900mm [3ft]	1200mm [4ft]
Source	RGBW Quad (Q) LED 5pcs	RGBW Quad (Q) LED 10pcs	RGBW Quad (Q) LED 15pcs	RGBW Quad (Q) LED 20pcs
Optics	15°			

Candela Distribution

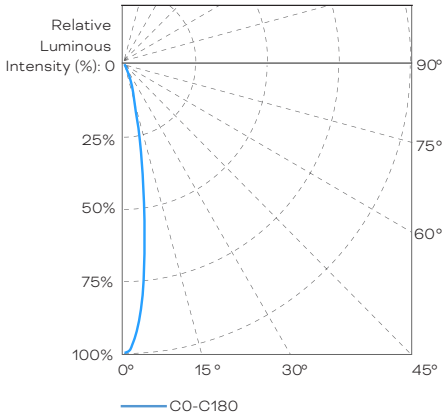

Illuminance at a Distance

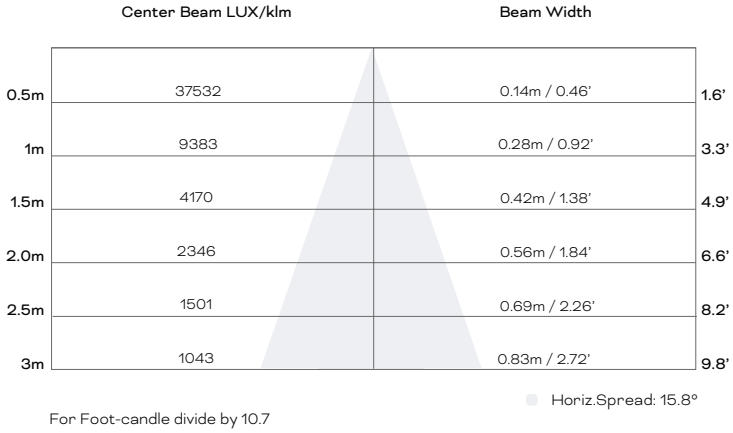

For Foot-candle divide by 10.7

IES and LDT files are available for download from the Traxon website.

©2026 TRAXON TECHNOLOGIES. ALL RIGHTS RESERVED.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ERRORS AND OMISSION EXCEPTED.

Linear Plus RGBW Quad

Light Output - Dynamic Boost Mode

		Color	Luminous Flux (lm)	Center Intensity (cd)	Efficacy (lm/W)
300mm [1ft]	4W	RGBW40 (Full On)	176.0	1621	44.0
	8W		390.4	3596	48.8
	12W		608.6	5605	50.7
	15W		775.5	7142	51.7
600mm [2ft]	8W	RGBW40 (Full On)	352.0	3242	44.0
	16W		780.9	7192	48.8
	24W		1217.2	11211	50.7
	30W		1551.0	14285	51.7
900mm [3ft]	12W	RGBW40 (Full On)	561.7	5173	46.8
	24W		1246.1	11476	51.9
	36W		1942.4	17889	54.0
	45W		2475.0	22795	55.0
1200mm [4ft]	16W	RGBW40 (Full On)	748.9	6897	46.8
	32W		1661.4	15302	51.9
	48W		2589.8	23852	54.0
	60W		3300.0	30393	55.0


Light Output - White Balance Mode

		Color	Luminous Flux (lm)	Center Intensity (cd)	Efficacy (lm/W)
300mm [1ft]	4W	RGBW40 (Full On)	255.3	2351	63.8
	8W		566.4	5217	70.8
	12W		882.9	8132	73.6
	15W		1125.0	10361	75.0
600mm [2ft]	8W	RGBW40 (Full On)	510.6	4703	63.8
	16W		1132.8	10433	70.8
	24W		1765.8	16263	73.6
	30W		2250.0	20723	75.0
900mm [3ft]	12W	RGBW40 (Full On)	817.0	7524	68.1
	24W		1812.5	16693	75.5
	36W		2825.3	26021	78.5
	45W		3600.0	33156	80.0
1200mm [4ft]	16W	RGBW40 (Full On)	1089.3	10032	68.1
	32W		2416.6	22257	75.5
	48W		3767.0	34694	78.5
	60W		4800.0	44208	80.0


©2026 TRAXON TECHNOLOGIES. ALL RIGHTS RESERVED.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ERRORS AND OMISSION EXCEPTED.


Source Specifications

Length Option	300mm [1ft]	600mm [2ft]	900mm [3ft]	1200mm [4ft]
Source	RGBW Quad (Q) LED 5pcs	RGBW Quad (Q) LED 10pcs	RGBW Quad (Q) LED 15pcs	RGBW Quad (Q) LED 20pcs
Optics	55° x 20° 			

Candela Distribution

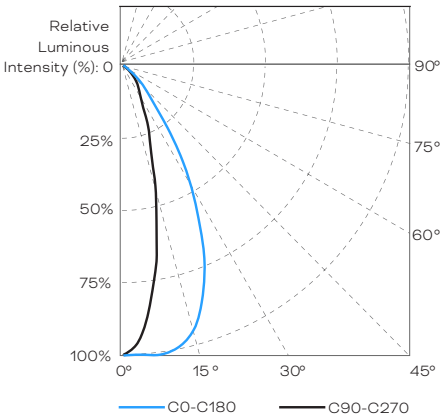

Illuminance at a Distance

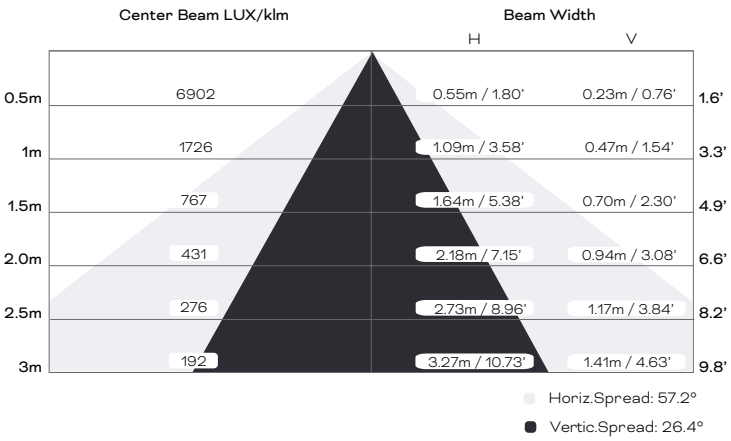

For Foot-candle divide by 10.7

IES and LDT files are available for download from the Traxon website.

©2026 TRAXON TECHNOLOGIES. ALL RIGHTS RESERVED.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ERRORS AND OMISSION EXCEPTED.

Linear Plus RGBW Quad

Photometrics

Light Output - Dynamic Boost Mode

		Color	Luminous Flux (lm)	Center Intensity (cd)	Efficacy (lm/W)
300mm [1ft]	4W	RGBW40 (Full On)	114.4	199	28.6
	8W		253.8	442	31.7
	12W		395.6	689	33.0
	15W		504.1	878	33.6
600mm [2ft]	8W	RGBW40 (Full On)	228.8	399	28.6
	16W		507.6	884	31.7
	24W		791.2	1378	33.0
	30W		1008.2	1756	33.6
900mm [3ft]	12W	RGBW40 (Full On)	365.1	636	30.4
	24W		810.0	1411	33.7
	36W		1262.5	2199	35.1
	45W		1608.8	2802	35.8
1200mm [4ft]	16W	RGBW40 (Full On)	486.8	848	30.4
	32W		1079.9	1881	33.7
	48W		1683.4	2932	35.1
	60W		2145.0	3737	35.8

Light Output - White Balance Mode


		Color	Luminous Flux (lm)	Center Intensity (cd)	Efficacy (lm/W)
300mm [1ft]	4W	RGBW40 (Full On)	165.9	289	41.5
	8W		368.2	641	46.0
	12W		573.9	1000	47.8
	15W		731.3	1274	48.8
600mm [2ft]	8W	RGBW40 (Full On)	331.9	578	41.5
	16W		736.3	1283	46.0
	24W		1147.8	1999	47.8
	30W		1462.5	2548	48.8
900mm [3ft]	12W	RGBW40 (Full On)	531.0	925	44.3
	24W		1178.1	2052	49.1
	36W		1836.4	3199	51.0
	45W		2340.0	4076	52.0
1200mm [4ft]	16W	RGBW40 (Full On)	708.0	1233	44.3
	32W		1570.8	2736	49.1
	48W		2448.6	4265	51.0
	60W		3120.0	5435	52.0


©2026 TRAXON TECHNOLOGIES. ALL RIGHTS RESERVED.


SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ERRORS AND OMISSION EXCEPTED.

Fixture

Unit: mm [inches]

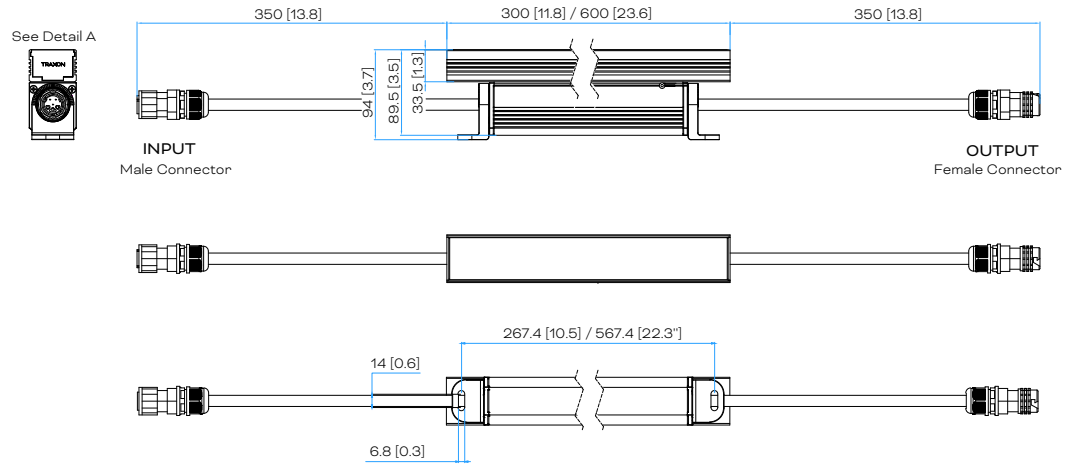

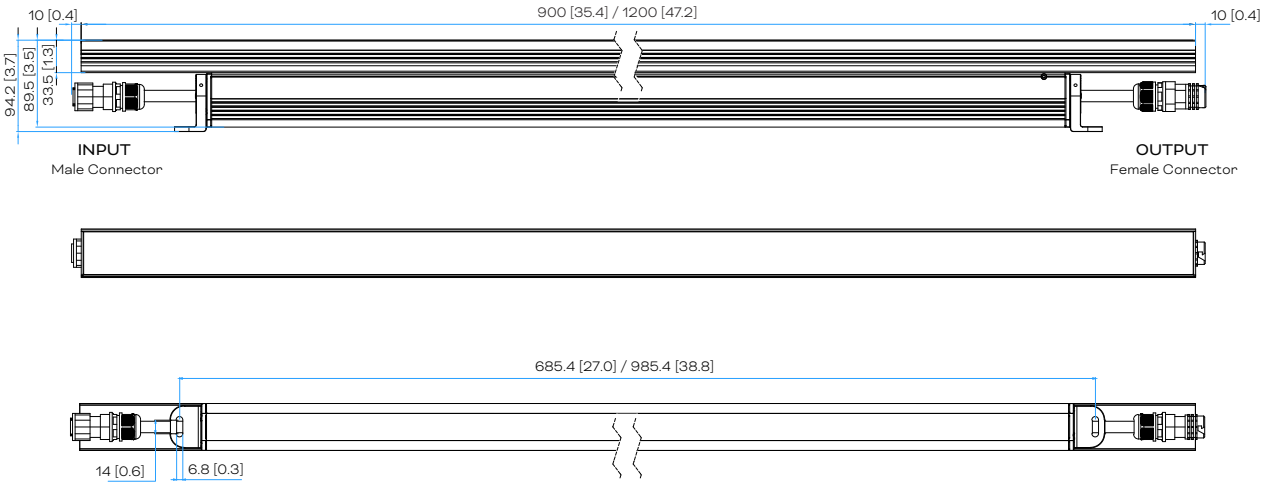

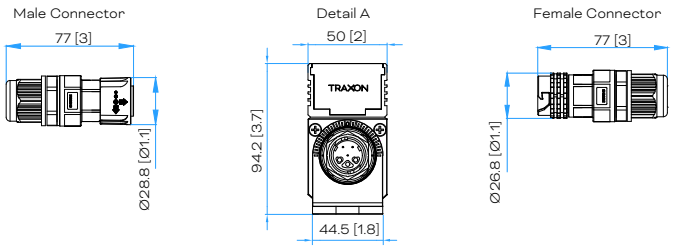


NOTE: Please see CAD files for additional dimensional data.

©2026 TRAXON TECHNOLOGIES. ALL RIGHTS RESERVED.


SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ERRORS AND OMISSION EXCEPTED.

Panel Mount Option


Unit: mm [inches]




Mounting Bracket can be removed and rotated.

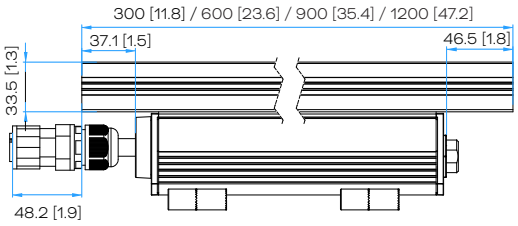


INPUT OUTPUT




Mounting bracket location is adjustable and can be slid along the length of the T-slot of the fixture.




Panel Mount Bracket Dimension




Stated min./max dimensions refer to spacing between two brackets.
300mm [1ft] Min: 80 [3.1] / Max: 150 [5.9]
600mm [2ft] Min: 100 [3.9] / Max: 450 [17.7]
900mm [3ft] Min: 200 [7.9] / Max: 750 [29.5]
1200mm [4ft] Min: 300[11.8] / Max: 1050 [41.3]

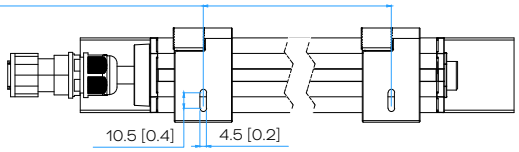

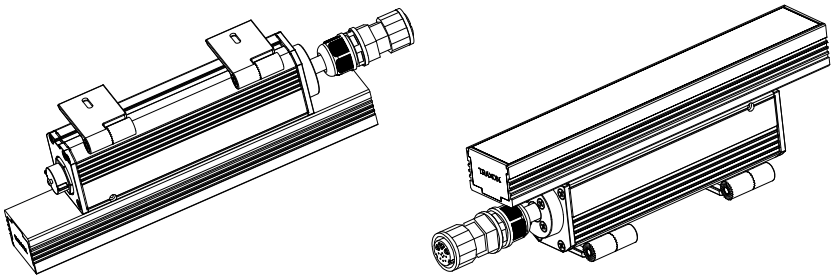


Minimum Clearance

Linear Plus

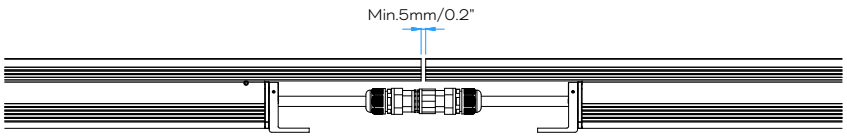

Linear Plus Panel Mount

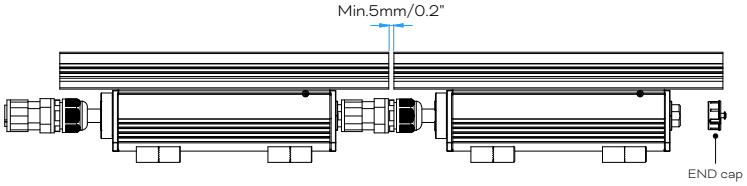

NOTE: For Panel Mount fixtures, the cables/connectors are already considered with minimum 5mm [0.2"] spacing when two fixtures are connected.

NOTE: Please see CAD files for additional dimensional data.


©2026 TRAXON TECHNOLOGIES. ALL RIGHTS RESERVED.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ERRORS AND OMISSION EXCEPTED.


Optical Accessories

Unit: mm [inches]


LINEAR PLUS LOUVER PLATE Quad

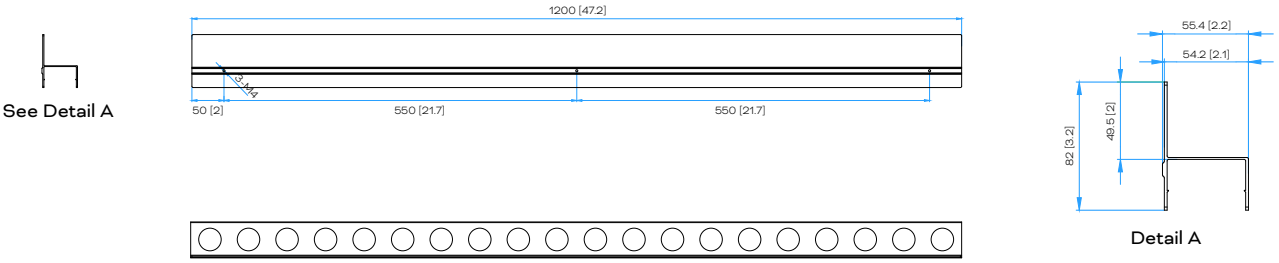


LINEAR PLUS LOUVER (ASYM) Quad

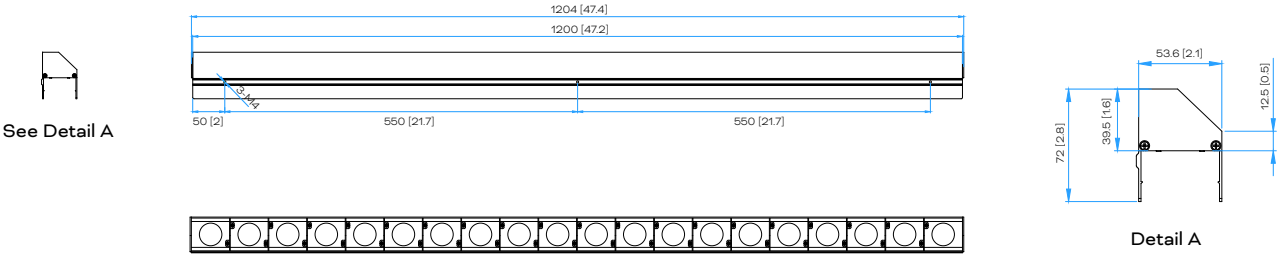

LINEAR PLUS HO LOUVER (SYM) Quad

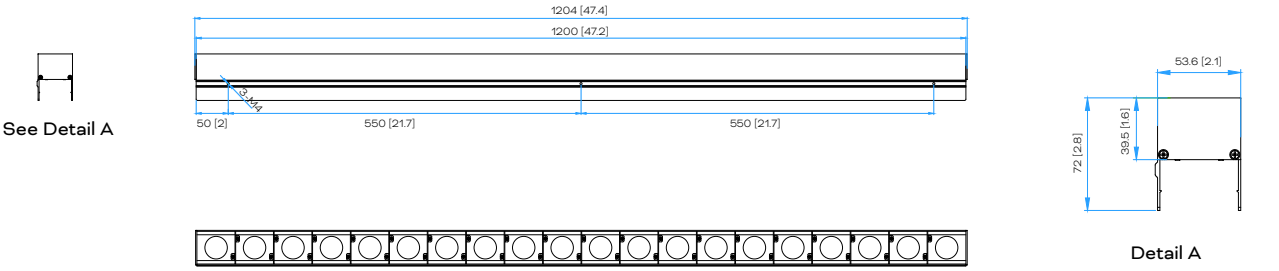

Color Finish: TX Signature Gray / Gray / Black / White

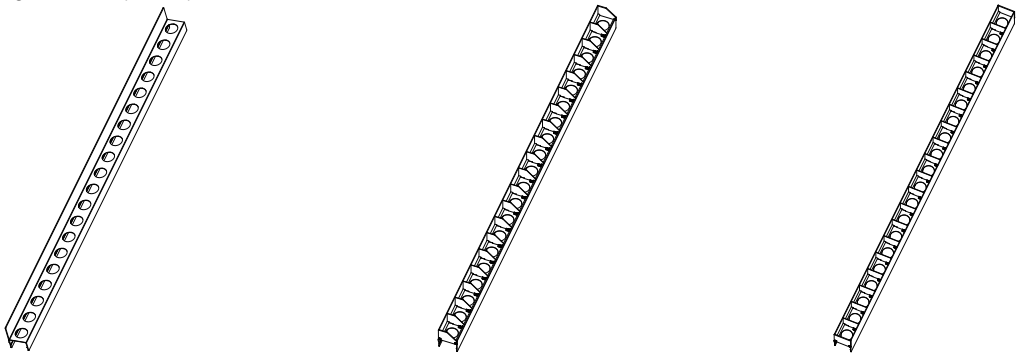

LINEAR PLUS LOUVER PLATE Quad | LINEAR PLUS LOUVER (ASYM) Quad | LINEAR PLUS HO LOUVER (SYM) Quad

NOTE: 300mm [11.8"] / 600mm [23.6"] / 900mm [35.4"] / 1200mm [47.2"] are available.

NOTE: Please see CAD files for additional dimensional data.


©2026 TRAXON TECHNOLOGIES. ALL RIGHTS RESERVED.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ERRORS AND OMISSION EXCEPTED.

Mounting Accessories

LINEAR PLUS STAKE KIT (1 PC) (DA25103496855)


Unit: mm [inches]

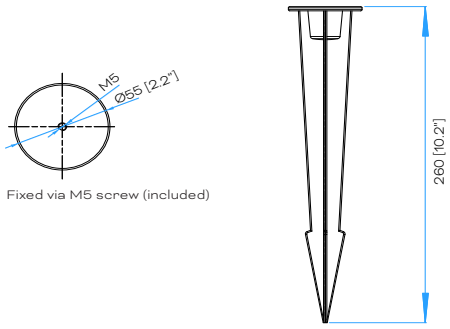

Color Finish: TX Signature Gray / Gray / Black / White

LINEAR PLUS WALL MOUNT ARM 300 / 600 / 900 (1 PC) (DA25103496555 / DA25103496655 / DA25103496755)

Unit: mm [inches]

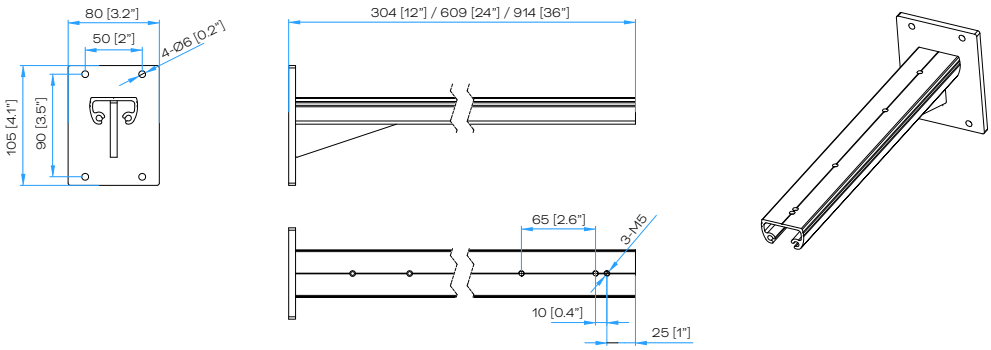


Color Finish: TX Signature Gray / Gray / Black / White

For the Linear Wall Mount Arm: Length options include 300mm (11.81") / 600mm (23.62") / 900mm (35.43")

LINEAR PLUS WALL MOUNT ARM EXTENDABLE 96-130 (1 PC) (DA25103496455)

Unit: mm [inches]

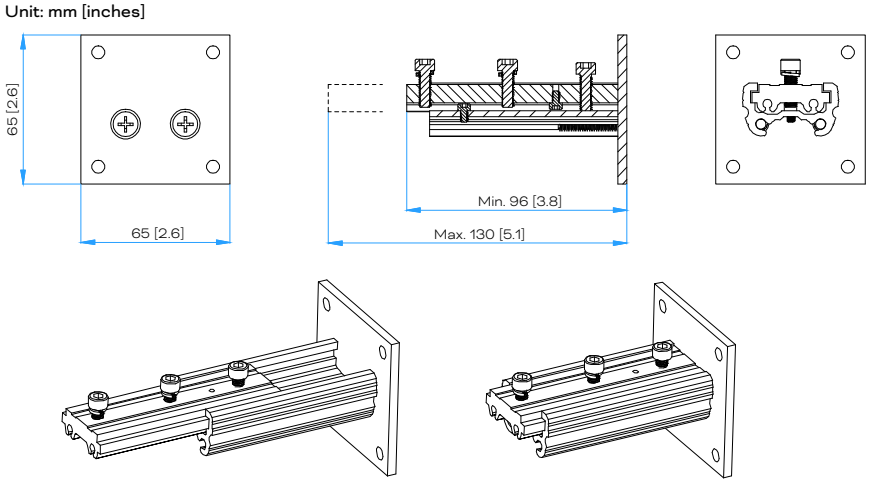

Color Finish: TX Signature Gray / Gray / Black / White

NOTE: Please see CAD files for additional dimensional data.


©2026 TRAXON TECHNOLOGIES. ALL RIGHTS RESERVED.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ERRORS AND OMISSION EXCEPTED.

Mounting Accessories

LINEAR PLUS CABLE CONCEALING KIT - FRONT (1PC) (DA26103671255)


Unit: mm [inches]

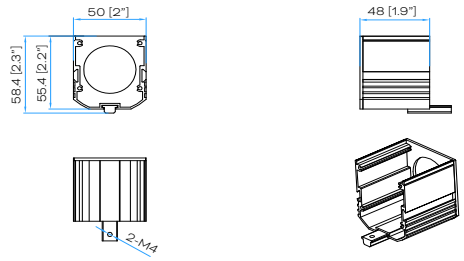

Color Finish: TX Signature Gray / Gray / Black / White

LINEAR PLUS CABLE CONCEALING KIT - MIDDLE (1PC) (DA25103513255)


Unit: mm [inches]

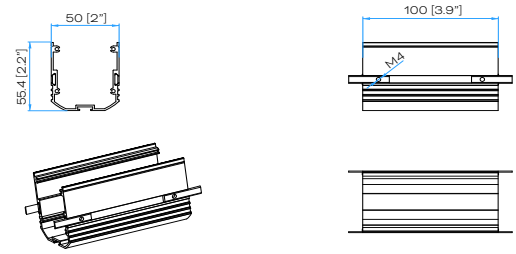

Color Finish: TX Signature Gray / Gray / Black / White

LINEAR PLUS CABLE CONCEALING KIT - END (1PC) (DA25103513355)

Unit: mm [inches]

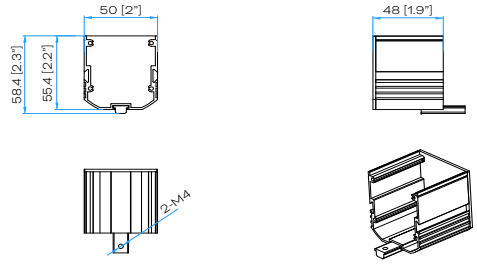

Color Finish: TX Signature Gray / Gray / Black / White


NOTE: Please see CAD files for additional dimensional data.


©2026 TRAXON TECHNOLOGIES. ALL RIGHTS RESERVED.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ERRORS AND OMISSION EXCEPTED.


Connection Accessories


DMX Starter Cable

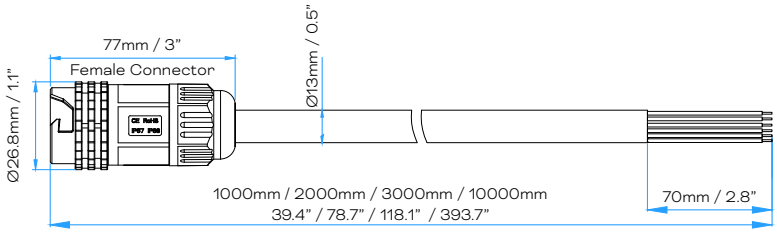

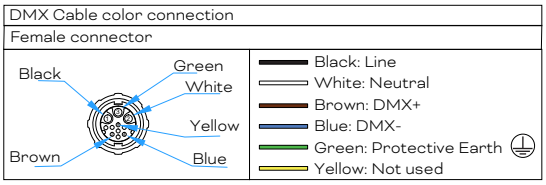

DMX Interconnection Cable

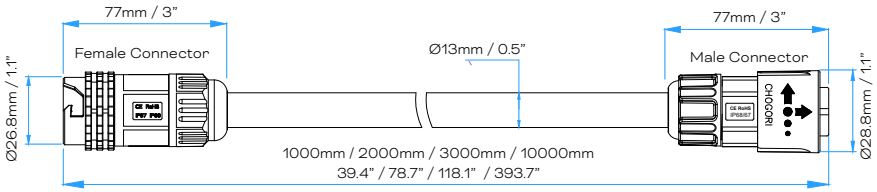

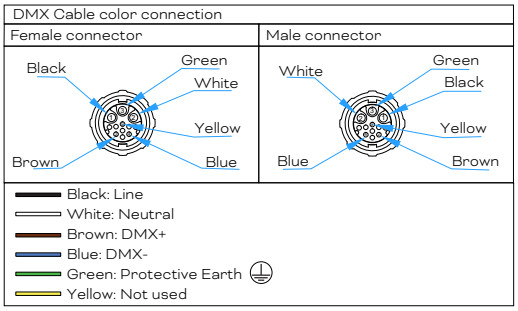



NOTE: Please see CAD files for additional dimensional data.

©2026 TRAXON TECHNOLOGIES. ALL RIGHTS RESERVED.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ERRORS AND OMISSION EXCEPTED.

Wiring Diagram without TYPE-1 Injector

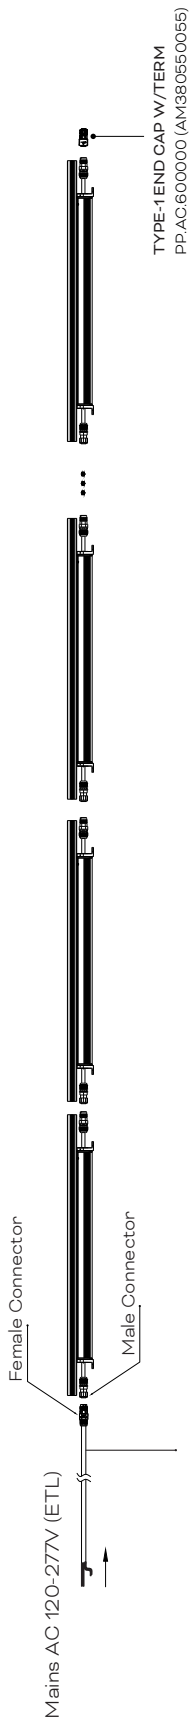

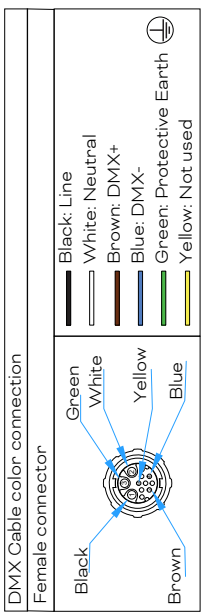

- Maximum number of fixtures is based on minimal interconnection lengths fixture to fixture.
- Actual number of fixtures is dependent on cable interconnection lengths. The number of fixtures will reduce if longer cable lengths are used.
- Please consult regional sales office to confirm maximums.


Maximum Number of Fixture per Chain

Length	Wattage	120V AC	220V AC	277V AC
300mm [1ft]	15W	48	92	118
600mm [2ft]	30W	32	62	80
900mm [3ft]	45W	25	49	62
1200mm [4ft]	60W	21	41	52

©2026 TRAXON TECHNOLOGIES. ALL RIGHTS RESERVED.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ERRORS AND OMISSION EXCEPTED.

Wiring Diagram with TYPE-1 Injector

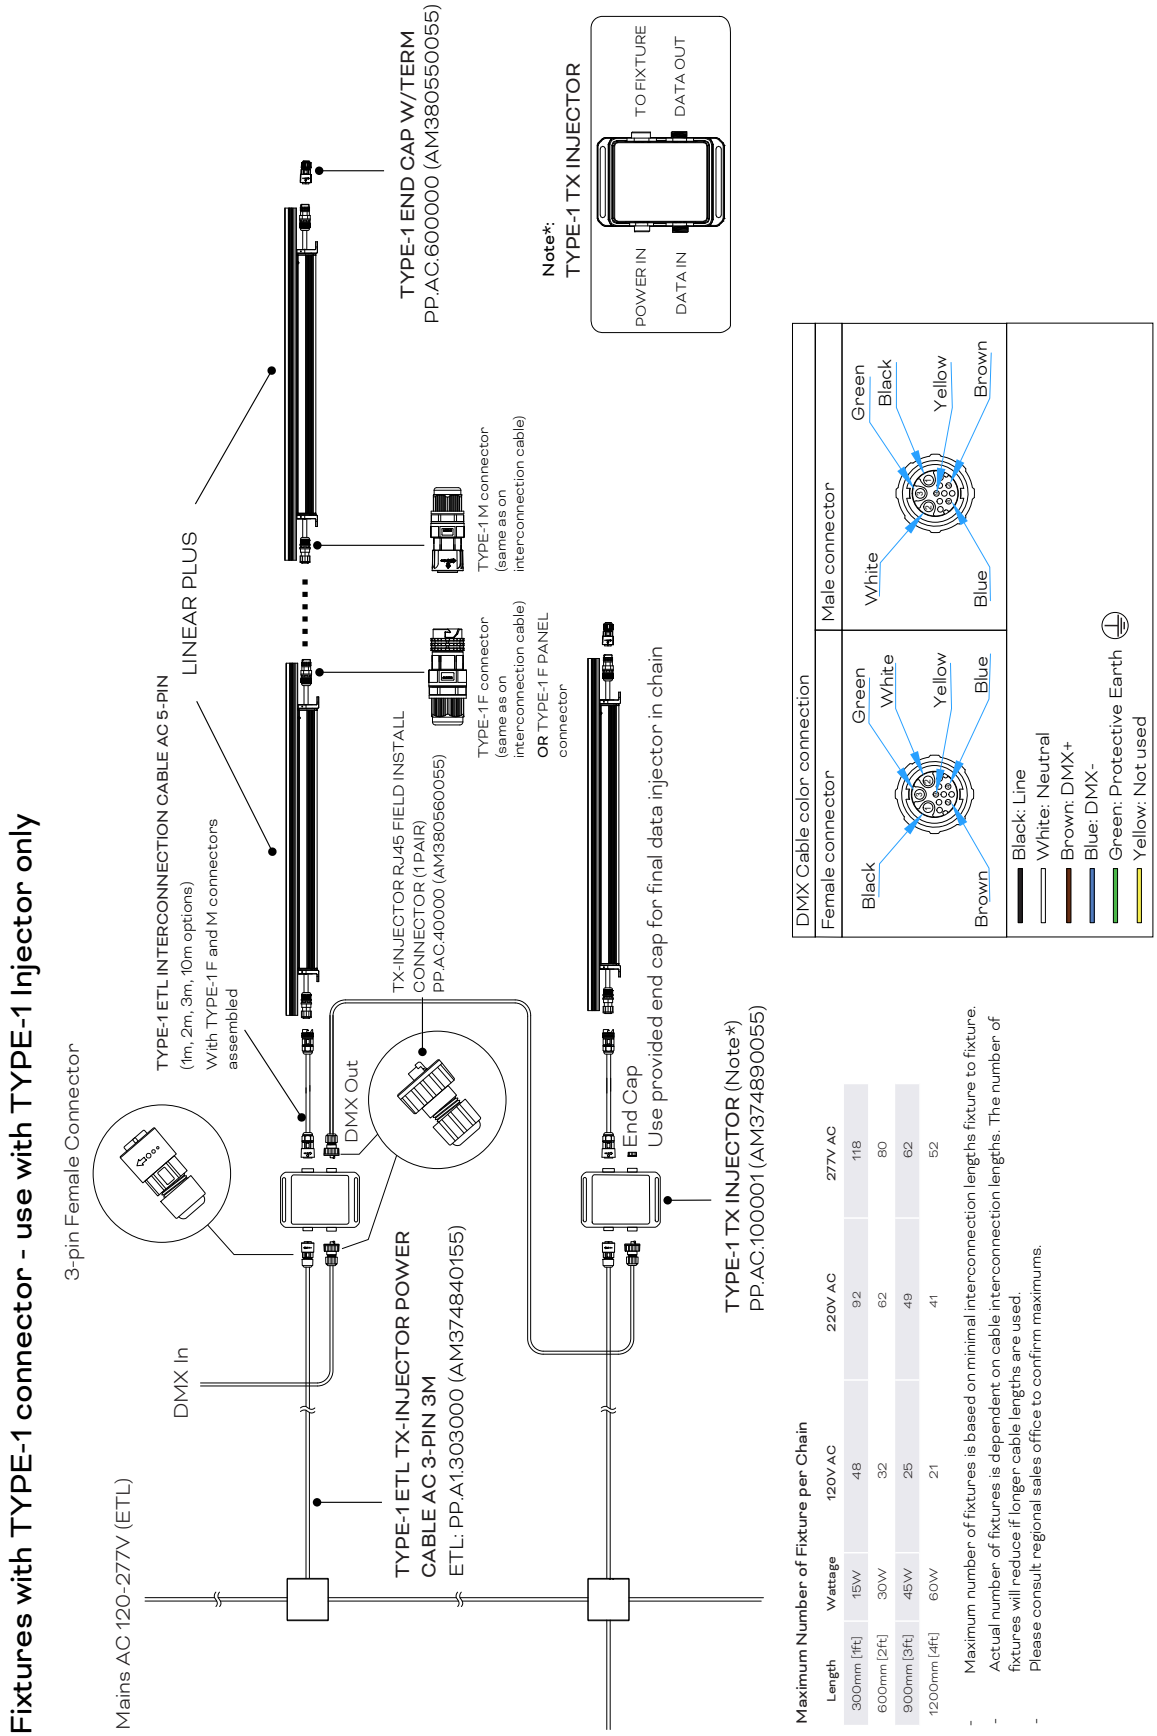

Maximum Number of Fixture per Chain

Length	Wattage	120V AC	220V AC	277V AC
300mm [1ft]	15W	48	92	118
600mm [2ft]	30W	32	62	80
900mm [3ft]	45W	25	49	62
1200mm [4ft]	60W	21	41	52

- Maximum number of fixtures is based on minimal interconnection lengths fixture to fixture.
- Actual number of fixtures is dependent on cable interconnection lengths. The number of fixtures will reduce if longer cable lengths are used.
- Please consult regional sales office to confirm maximums.

©2026 TRAXON TECHNOLOGIES. ALL RIGHTS RESERVED.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ERRORS AND OMISSION EXCEPTED.

Model Number Builder

LI.	PL.	1	NN	1	N	1	N	N	1	2	N	N	N	1	00
		Housing	Power per 0.3m (1ft)	LED**	CCT***	CRI	Optics/Beam	Length	Control	Approbation	Color Finish	Pixel*	Cable/ Connector		
			04 - 4W	1 - RGBW (Q)	3 - 3000K	1 - Default	2 - 15°	1 - 300mm (1ft)	1 - DMX/ RDM	2 - ETL	0 - TX Signature Gray	1 - 1PXL/fixture	1 - Type 1		
			08 - 8W		5 - 4000K		3 - 20°	2 - 600mm (2ft)			1 - Gray	2 - 2PXL/fixture	3 - Type 1 Panel		
			12 - 12W				5- 30°	3 - 900mm (3ft)			2 - Black	3 - 3PXL/fixture			
			15 - 15W				8 - 45°	4 - 1200mm (4ft)			3 - White	4 - 4PXL/fixture			
							9 - 60°								
							E - 55°x20°								
							C - 60°x15°								
							D - 60°x30°								

* Standard Pixel: 300mm fixture - 1PXL, 600mm fixture - 2PXL, 900mm - 3PXL, 1200mm fixture - 4 PXL.
**RGBW (Q) = RGBW Quad LED.
*** CCT 3000K is on demand.

EXAMPLE LINEAR PLUS 60W RGBW30(Q) 15° 1200 ETL 4PXL (CC)
Model Number: LI.PL.1151312412041100

LI.	PL.	1	15	1	3	1	2	4	1	2	0	4	1	1	00

Project Model Number

LI.	PL.	1		1		1			1	2				1	00

Injector

Model No.	Description	Item Code
PP.AC.100001	TYPE-1 TX INJECTOR	AM374890055
PP.AC.100002	TYPE-1 TX INJECTOR BL	AM374900055
PP.AC.100003	TYPE-1 TX INJECTOR WT	AM374910055
PP.AC.400000	TX INJECTOR RJ45 FLD CTRS (PAIR)	AM380560055

Cable/Connector

Model No.	Description	Item Code
PP.A1.303000	TYPE-1 ETL TX-INJECTOR POWER CABLE AC 3-PIN 3M	AM374840155
KO.KA.601000	TYPE-1 ETL INTERCONNECTION CABLE AC 5-PIN 1M	AM357490055
KO.KA.602000	TYPE-1 ETL INTERCONNECTION CABLE AC 5-PIN 2M	AM357500055
KO.KA.603000	TYPE-1 ETL INTERCONNECTION CABLE AC 5-PIN 3M	AM357510055
KO.KA.610000	TYPE-1 ETL INTERCONNECTION CABLE AC 5-PIN 10M	AM357520055
CA.SC.CC201000	TYPE-1 ETL STARTER CABLE AC 5-PIN 1M	DA23100149355
CA.SC.CC202000	TYPE-1 ETL STARTER CABLE AC 5-PIN 2M	DA23100149455
CA.SC.CC203000	TYPE-1 ETL STARTER CABLE AC 5-PIN 3M	DA23100149555
CA.SC.CC210000	TYPE-1 ETL STARTER CABLE AC 5-PIN 10M	DA23100149655
PP.AC.600000	TYPE-1 END CAP W/TERM	AM380550055

©2026 TRAXON TECHNOLOGIES. ALL RIGHTS RESERVED.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ERRORS AND OMISSION EXCEPTED.

Optical Accessories

Model No.	Description	Item Code
LIPL.LO-S.6L1000	LINEAR PLUS LOUVER (SYM) Discrete 300	DA25103492855
LIPL.LO-S.7L1000	LINEAR PLUS LOUVER (SYM) Discrete 600	DA25103492955
LIPL.LO-S.8L1000	LINEAR PLUS LOUVER (SYM) Discrete 900	DA25103493055
LIPL.LO-S.9L1000	LINEAR PLUS LOUVER (SYM) Discrete 1200	DA25103493155
LIPL.LO-A.6L1000	LINEAR PLUS LOUVER (ASYM) Discrete 300	DA25103493255
LIPL.LO-A.7L1000	LINEAR PLUS LOUVER (ASYM) Discrete 600	DA25103493355
LIPL.LO-A.8L1000	LINEAR PLUS LOUVER (ASYM) Discrete 900	DA25103493455
LIPL.LO-A.9L1000	LINEAR PLUS LOUVER (ASYM) Discrete 1200	DA25103493555
LIPL.LO-P.6L1000	LINEAR PLUS LOUVER PLATE Discrete 300	DA25103493655
LIPL.LO-P.7L1000	LINEAR PLUS LOUVER PLATE Discrete 600	DA25103493755
LIPL.LO-P.8L1000	LINEAR PLUS LOUVER PLATE Discrete 900	DA25103493855
LIPL.LO-P.9L1000	LINEAR PLUS LOUVER PLATE Discrete 1200	DA25103493955

Mounting Accessories

Model No.	Description	Item Code
N/A	LINEAR PLUS WALL MOUNT ARM EXTENDABLE 96-130 (1 PC)	DA25103496455
N/A	LINEAR PLUS WALL MOUNT ARM 300 (1 PC)	DA25103496555
N/A	LINEAR PLUS WALL MOUNT ARM 600 (1 PC)	DA25103496655
N/A	LINEAR PLUS WALL MOUNT ARM 900 (1 PC)	DA25103496755
N/A	LINEAR PLUS STAKE KIT (1 PC)	DA25103496855
N/A	LINEAR PLUS CABLE CONCEALING KIT - MIDDLE (1PC)	DA25103513255
N/A	LINEAR PLUS CABLE CONCEALING KIT - END (1PC)	DA25103513355
N/A	LINEAR PLUS CABLE CONCEALING KIT - FRONT (1PC)	DA26103671255

©2026 TRAXON TECHNOLOGIES. ALL RIGHTS RESERVED.
SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ERRORS AND OMISSION EXCEPTED.