

TRAXON Plus⁺

Vista Plus HO Maxi White



Project: _____

Type: _____



IP66



COAST



DMX/RDM



ANSI 3G



IK08



The Vista Plus HO Maxi White is an AC line powered, high brightness luminaire. Controllable with DMX512, the Vista Plus HO Maxi White is a new member of the Vista Plus family, offering 380W per head with 1-head, 2-head options. The daisy chain topology, and direct-wire nature of the fixture via the two integral cable whips allow for simple installation into existing installations and new structures, and is ideal for high-rise and tower illumination.


Features

- DMX / RDM control
- Easy installation and maintenance
- Assortment of optical and installation accessories


Dimensions

Unit: mm

Vista Plus Maxi 1x380W

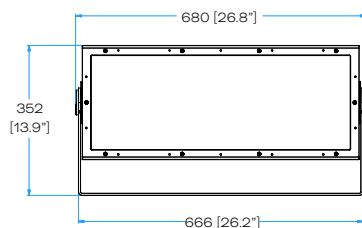


Vista Plus Maxi 2x380W

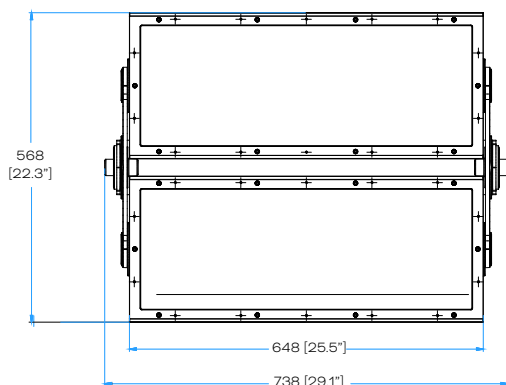

Technologies


- Auto-Addressing / Manual Addressing
- DMX / RDM control

Color Options



3000K / 4000K Std; 2700K, 3500K, 5700K, 6500K available
DW on demand

Beam Angles

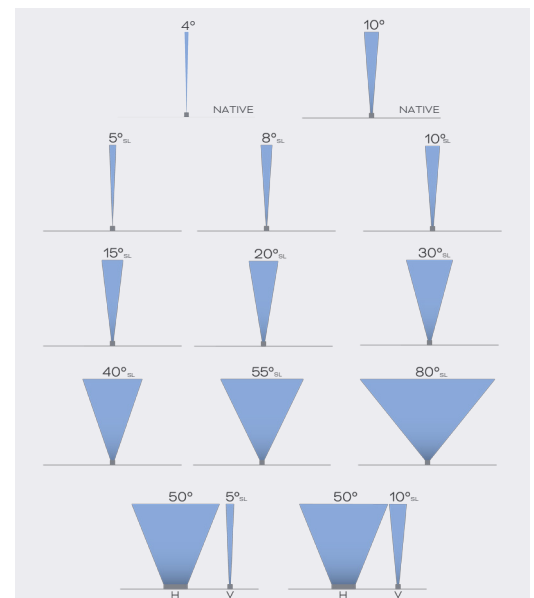

Finish



Traxon Signature Gray
RAL 7005



RAL 7015



RAL 9005



RAL 9003



Custom

Product Specifications

Model	1 x 380W	2 x 380W
Light Source	White LED x 112	White LED x 224
Pixel	1 pixel per head, each head can be controlled individually	
Color Range	3000K / 4000K Std; 2700K, 3500K, 5700K, 6500K available DW on demand (e.g. 2700K+5700K)	
LED Quantity	White LED 112 pcs (DW on demand, 56pcs WW, 56pcs CW)	White LED 224 pcs (DW on demand, 112pcs WW, 112pcs CW)
Luminous Flux (4000K)	41800 lm (4° SW)	83600 lm (4° SW)
Candela (4000K)	2259708 cd (4° SW)	4519416 cd (4° SW)
Efficacy (4000K)	110 lm/W (4° SW)	
CRI	90 CRI by request: 2700K-4000K (CRI90)	
Beam Angles	4° & 10° native ¹ ; 5°, 8°, 10°, 15°, 20°, 30°, 40°, 55°, 80°, 50° x 10°, 50° x 5° via accessory	
Cover Lens	Tempered Glass	
Housing	Die Cast Aluminum	
Housing Finish Options	Standard color: Traxon Signature Gray (RAL7005) Optional color: Gray (RAL7015), Black (RAL9005), White (RAL9003), Custom	
Adjustment Options	1x380W: ±90° vertical 2x380W: ±30° vertical per head, see page 5 for additional information	
Mounting	Surface Mount Optional mounting accessories are available	
Dimensions (W x D x H)	680mm x 352mm x 268mm (26.8" x 13.9" x 10.6")	738mm x 648mm x 174mm (29.1" x 25.5" x 6.9")
Weight	22.3 kg (49.17 lbs.)	45.5 kg (100.31 lbs.)
EPA	Front: 1.17 Side: 0.63	Front: 1.25 Side: 1.48
Regulatory Listing & Safety Approval	cETLus, CE, UKCA, FCC, RoHS, REACH, ASTM B117-16, ANSI 3G	
Operating Temperature	-30°C to +55°C / -22°F to +131°F	
Minimum Starting Temperature	-20°C / -4°F	
Storage Temperature	-40°C to +80°C / -40°F to +176°F	
Environment	Outdoor, IP66, IK08, Coastal Environment (ASTM B117-16)	
Humidity	85%, non-condensing	

Electrical Specifications

Operating Voltage ²	120-277V AC 50/60Hz	
Power Consumption (W)	380	760
Lumen Maintenance	L70 @25°C 81,000hrs	
Power Factor	> 0.9	

System Specifications

Power Supply	AC line
Control	DMX/RDM RDM personality: 16 bit 0-10V Dimming on demand (White only)
Addressing Options ³	Auto-addressing ON or Auto-addressing OFF (Default as Auto-addressing OFF, address through RDM)

1: 4° native with actual measurement of avg. 4.8°.
2: Auto-switching, Single phase (line, neutral and ground).
3: Auto-addressing Off (i.e. Manual addressing) is as default.

LED CHARACTERISTICS Because LEDs are semiconductor devices, their performances are subject to inherent variability commonly found in semiconductor industry. To improve consistency in performance across the same product, LED manufacturers "sort" LEDs into bins according to different preset parameters, such as forward driving voltage, illumination, etc. Whereas binning is a sorting function, it is not a correction process. Inherent variability in the manufacturing process results always in different binning distributions according to different production lots. Traxon uses automatically binned LEDs on its products, thereby minimizing output variations within the model range.


As with all electronic devices, LED output degrades over time – a term called lumen depreciation. This also explains why it is nearly impossible to expect photometric performances of two LED products with different service life spans to be the same. The rate of LED degrade is a complicated function of many factors such as operating efficiency, duration of continuous operation, and more significantly, environmental conditions (ambient temperature for example). If allowed working under optimal operating temperature range and with good ventilation, LED devices enjoy long service lives over conventional light sources. When using/installing LED devices, care should be taken to ensure that the devices will operate within the operating conditions specified in respective product literature.

Lumen measurement complies with LM-79-08 standard.
Lumen maintenance is calculated based on LM-80 compliant measurement.

Source Specifications

Length Option	1x380W	2x380W
Source	White LED 112 pcs (DW on demand, 56pcs WW, 56pcs CW)	White LED 224 pcs (DW on demand, 112pcs WW, 112pcs CW)
Optics	4°	

Candela Distribution

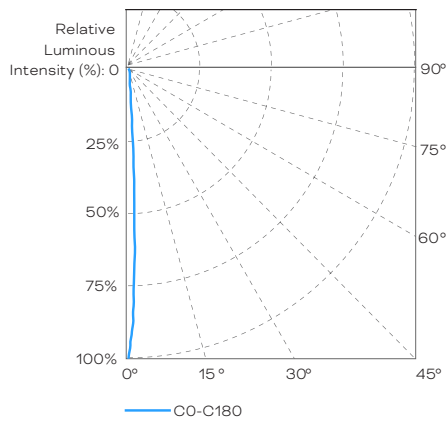

Light Output

	Color	Luminous Flux (lm)	Center Intensity (cd)	Efficacy (lm/W)
1x380W	3000K	36784.0	1988543	96.8
	4000k	41800.0	2259708	110.0
2x380W	3000K	73568.0	3977086	96.8
	4000k	83600.0	4519416	110.0

Illuminance at a Distance

	Center Beam LUX/klm	Beam Width	
16m	240	1.34m / 4.40'	52.49'
32m	60	2.68m / 8.79'	104.99'
48m	27	4.02m / 13.19'	157.48'
64m	15	5.36m / 17.59'	209.97'
80m	10	6.71m / 22.01'	262.47'


■ Horiz.Spread: 4.8°

For Foot-candle divide by 10.7
IES and LDT files are available for download from the Traxon website.

Source Specifications

Length Option	1x380W	2x380W
Source	White LED 112 pcs (DW on demand, 56pcs WW, 56pcs CW)	White LED 224 pcs (DW on demand, 112pcs WW, 112pcs CW)
Optics	10°	

Candela Distribution

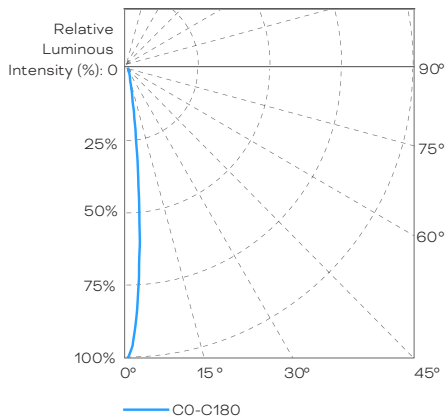

Light Output

	Color	Luminous Flux (lm)	Center Intensity (cd)	Efficacy (lm/W)
1x380W	3000K	33841.3	895227	89.1
	4000k	38456.0	1017303	101.2
2x380W	3000K	67682.6	1790454	89.1
	4000k	76912.0	2034607	101.2

Illuminance at a Distance

	Center Beam LUX/klm	Beam Width	
0.5m	96750	0.08m / 0.26'	1.64'
1m	24187	0.16m / 0.52'	3.28'
1.5m	10750	0.24m / 0.79'	4.92'
2m	6047	0.32m / 1.05'	6.56'
2.5m	3870	0.40m / 1.31'	8.2'
3m	2687	0.48m / 1.57'	9.84'

■ Horiz.Spread: 9.2°


For Foot-candle divide by 10.7

IES and LDT files are available for download from the Traxon website.

	Power input cable	Data in / out cable (combined)
Cable Length (open wire)	1830mm [72"]	1830mm [72"]
Cable Outer Diameter	7.8mm [0.31"]	8.1mm [0.32"]


Fixture - 1x380W

Unit: mm

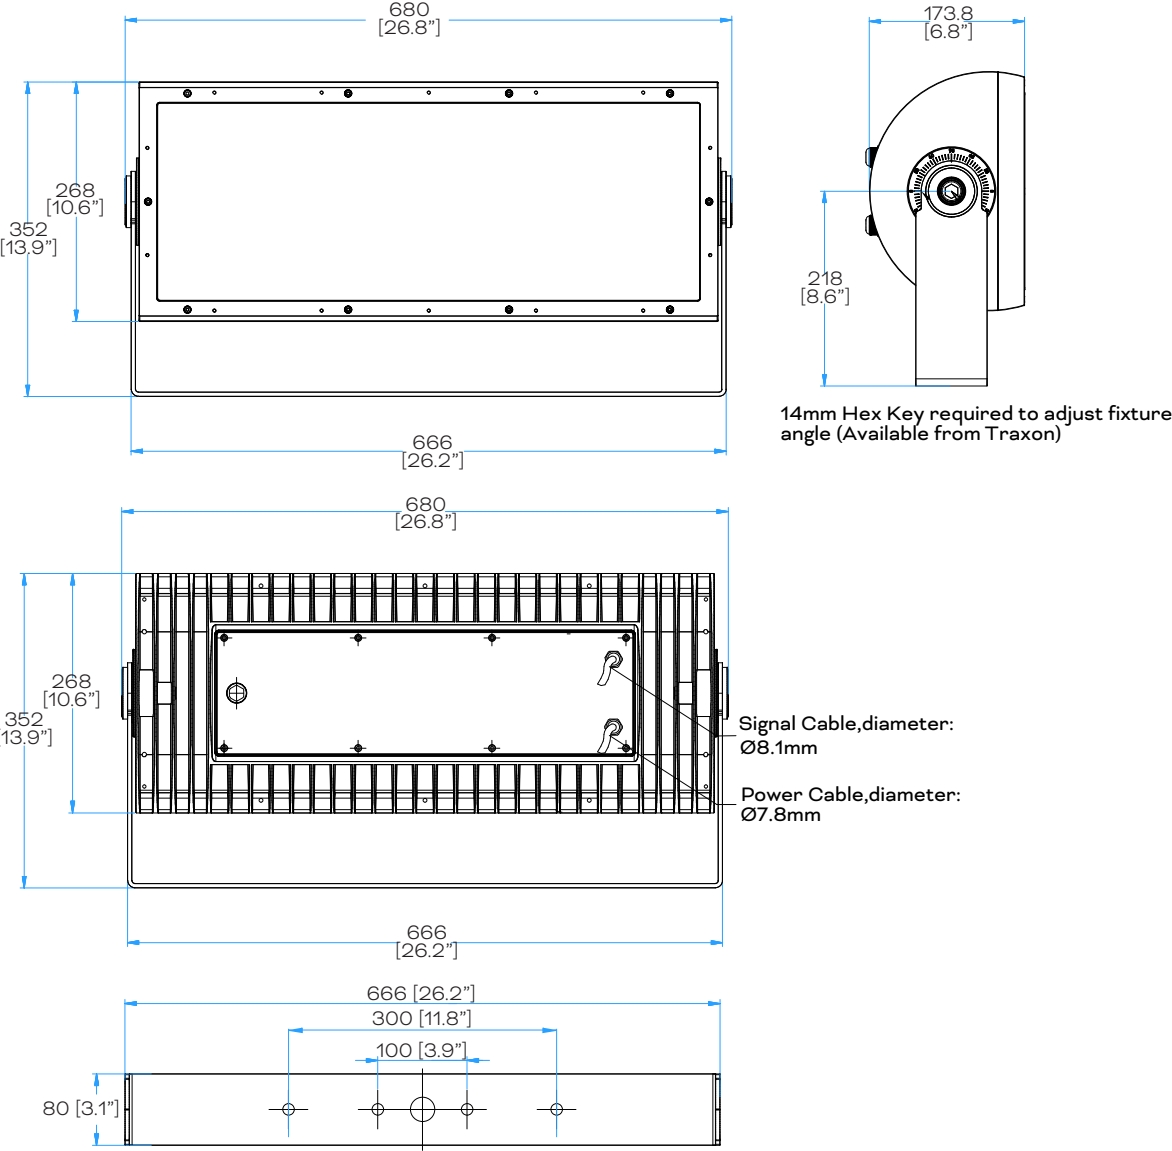

NOTE: Please see CAD files for additional dimensional data.


Fixture - 2x380W

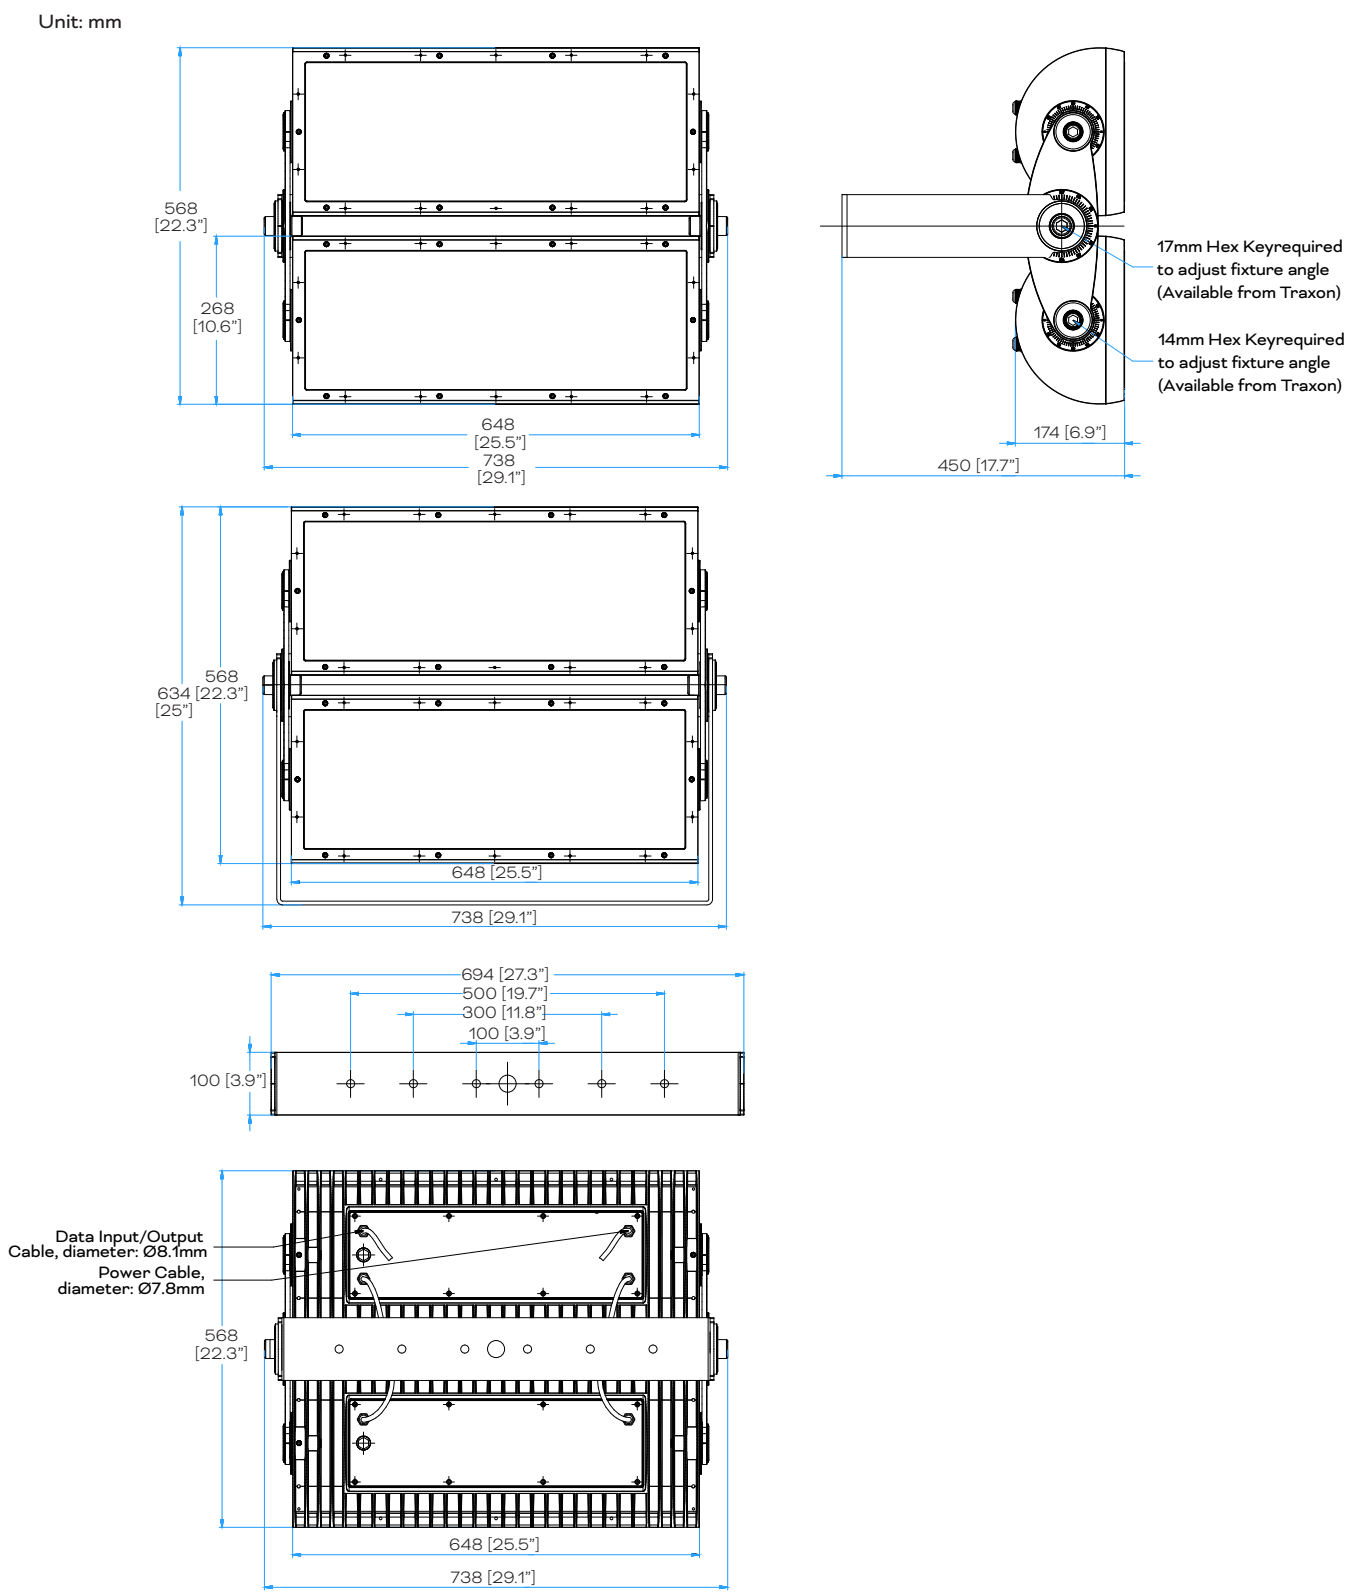

NOTE: Please see CAD files for additional dimensional data.

Mounting Accessories

Model No.	Description	Item Code
N/A	VISTA PLUS POLE-MOUNTING SUPPORT TX-GRAY	DA26104885355
N/A	VISTA PLUS POLE-MOUNTING SUPPORT RAL7015	AM380750055
N/A	VISTA PLUS POLE-MOUNTING SUPPORT RAL9005	AM380900055
N/A	VISTA PLUS POLE-MOUNTING SUPPORT RAL9003	AM381050055

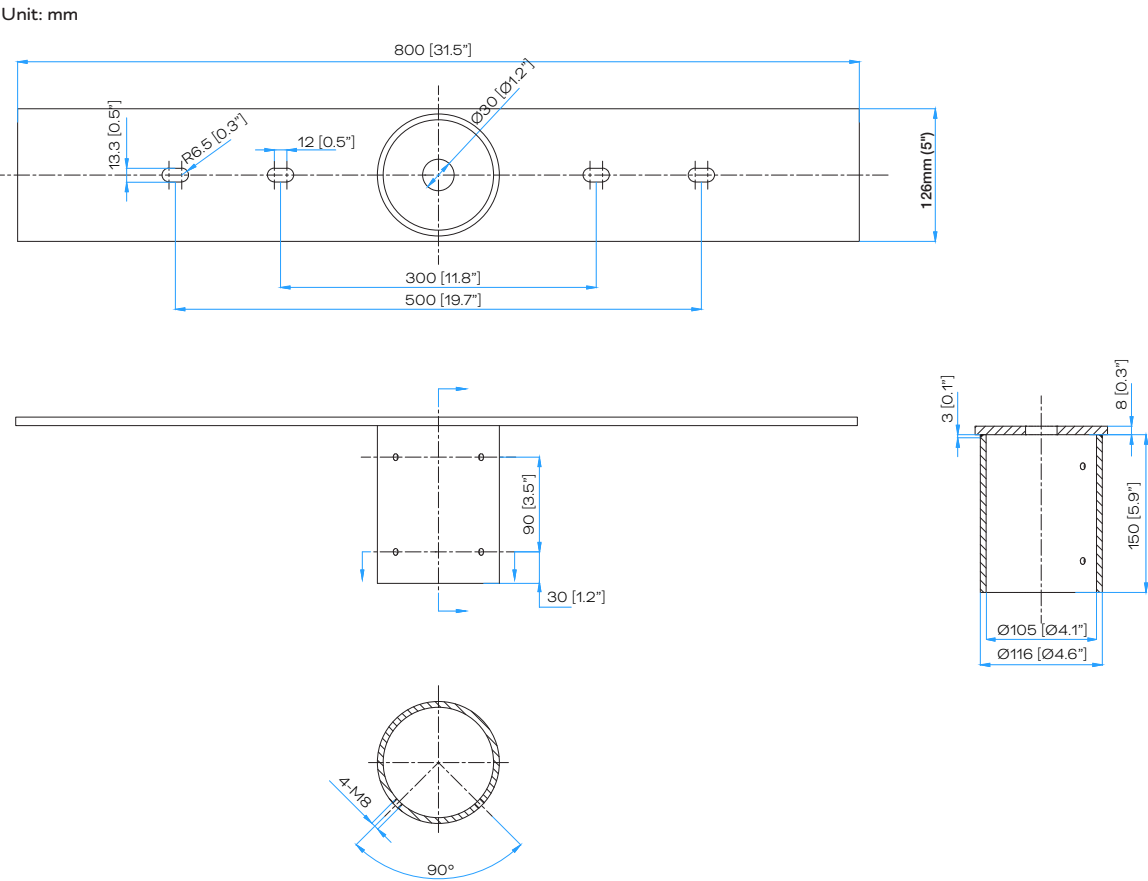

Model No.	Description	Item Code
N/A	PROPOINT TERMINATION KIT	AM243520054




NOTE: Please see CAD files for additional dimensional data.

Optical Accessories

Full Glare Shield

Model No.	Description	Item Code
N/A	VISTA PLUS MAXI FULL SHIELD TX-GRAY (1-HEAD)	DA26104884055
N/A	VISTA PLUS MAXI FULL SHIELD RAL7015 (1-HEAD)	AM380720055
N/A	VISTA PLUS MAXI FULL SHIELD RAL9005 (1-HEAD)	AM380880055
N/A	VISTA PLUS MAXI FULL SHIELD RAL9003 (1-HEAD)	AM381030055

Unit: mm

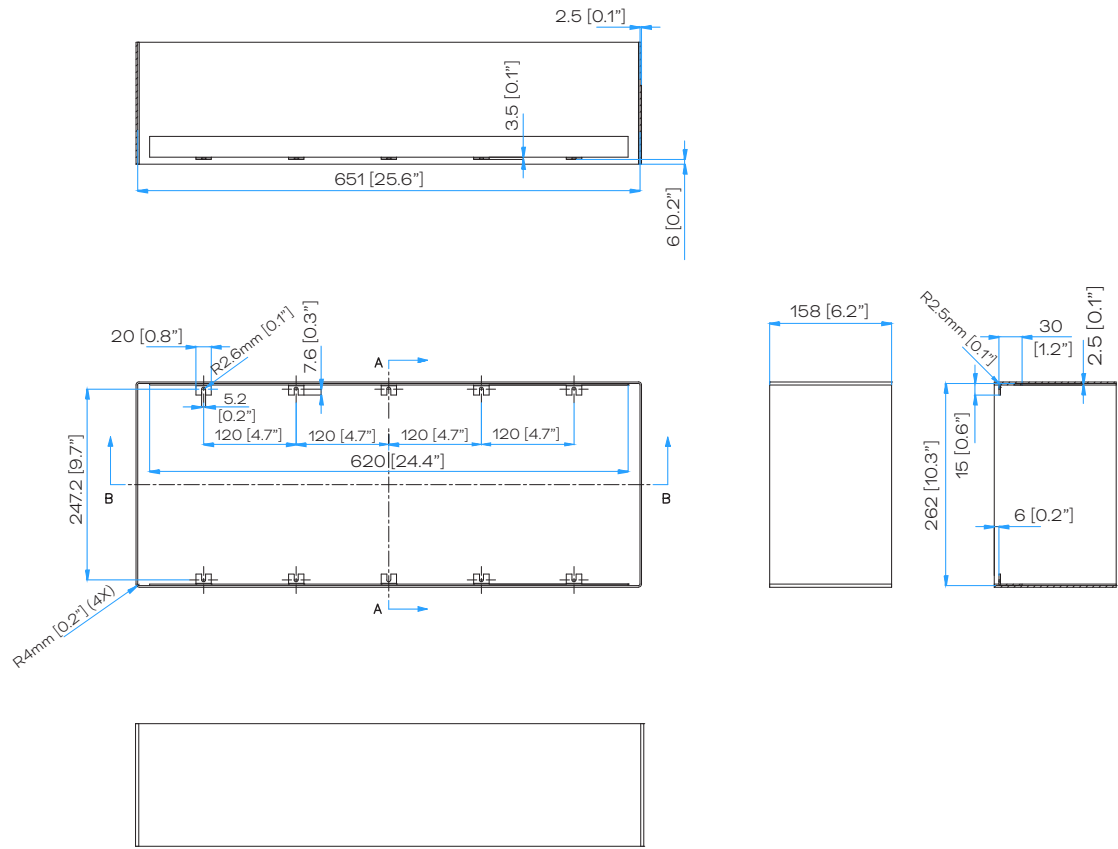

Half Glare Shield


Model No.	Description	Item Code
N/A	VISTA PLUS MAXI HALF SHIELD TX-GRAY (1-HEAD)	DA26104883955
N/A	VISTA PLUS MAXI HALF SHIELD RAL7015 (1-HEAD)	AM380690055
N/A	VISTA PLUS MAXI HALF SHIELD RAL9005 (1-HEAD)	AM380870055
N/A	VISTA PLUS MAXI HALF SHIELD RAL9003 (1-HEAD)	AM381020055

NOTE: Please see CAD files for additional dimensional data.

Optical Accessories

Half Glare Shield

Unit: mm

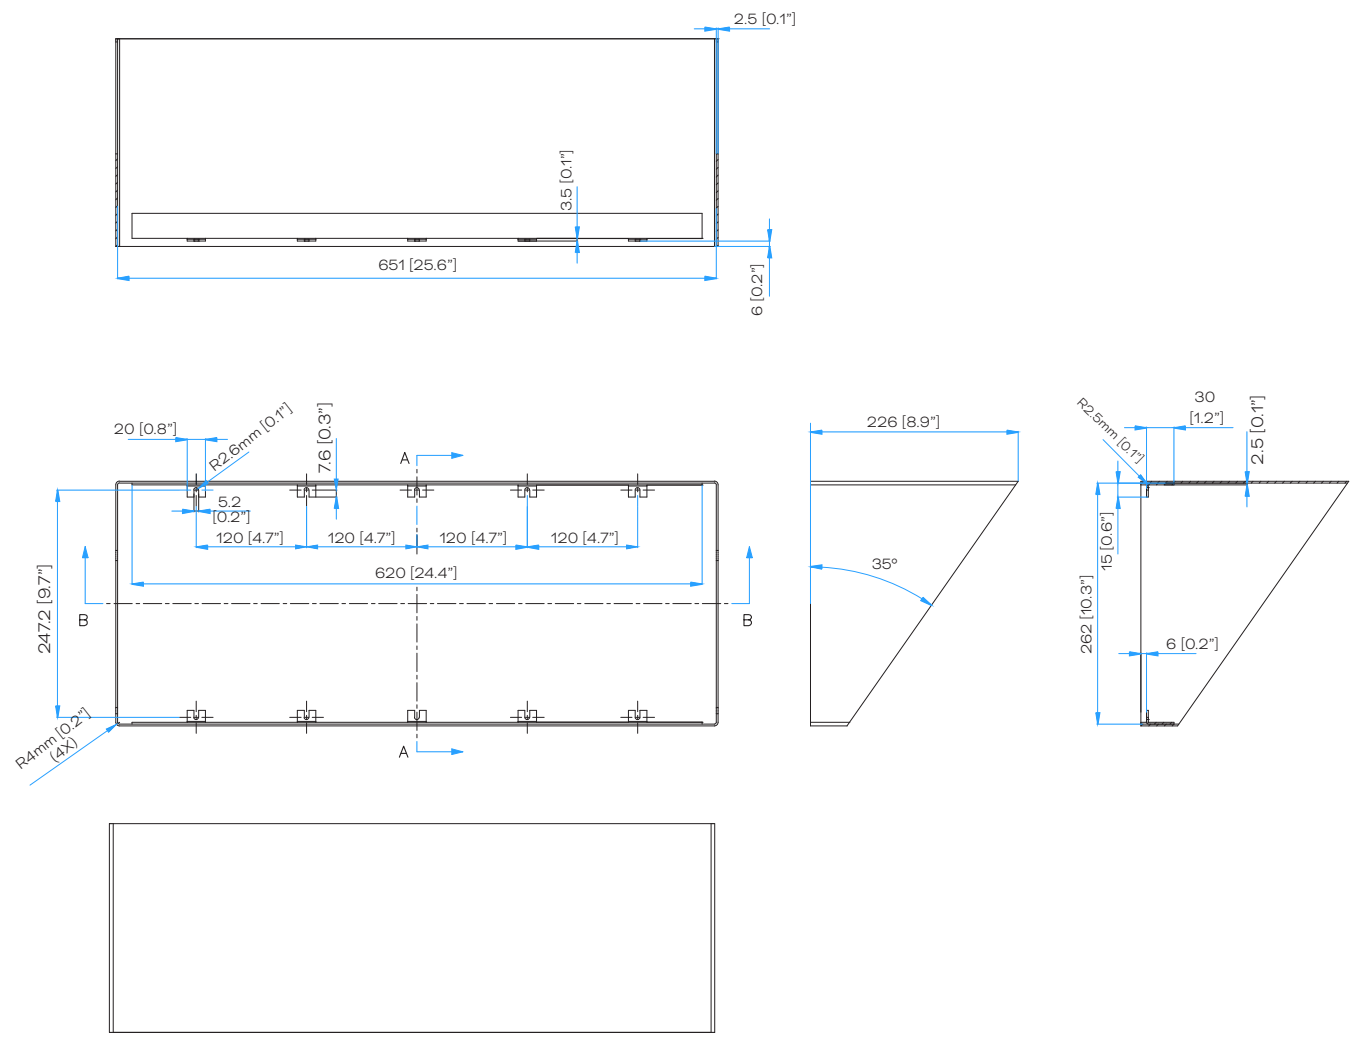

Rock Guard


Model No.	Description	Item Code
N/A	VISTA PLUS MAXI ROCK GUARD TX-GRAY (1-HEAD)	DA26104884155
N/A	VISTA PLUS MAXI ROCK GUARD RAL7015 (1-HEAD)	AM380730055
N/A	VISTA PLUS MAXI ROCK GUARD RAL9005 (1-HEAD)	AM380890055
N/A	VISTA PLUS MAXI ROCK GUARD RAL9003 (1-HEAD)	AM381040055

NOTE: Please see CAD files for additional dimensional data.

Optical Accessories

Rock Guard

Unit: mm

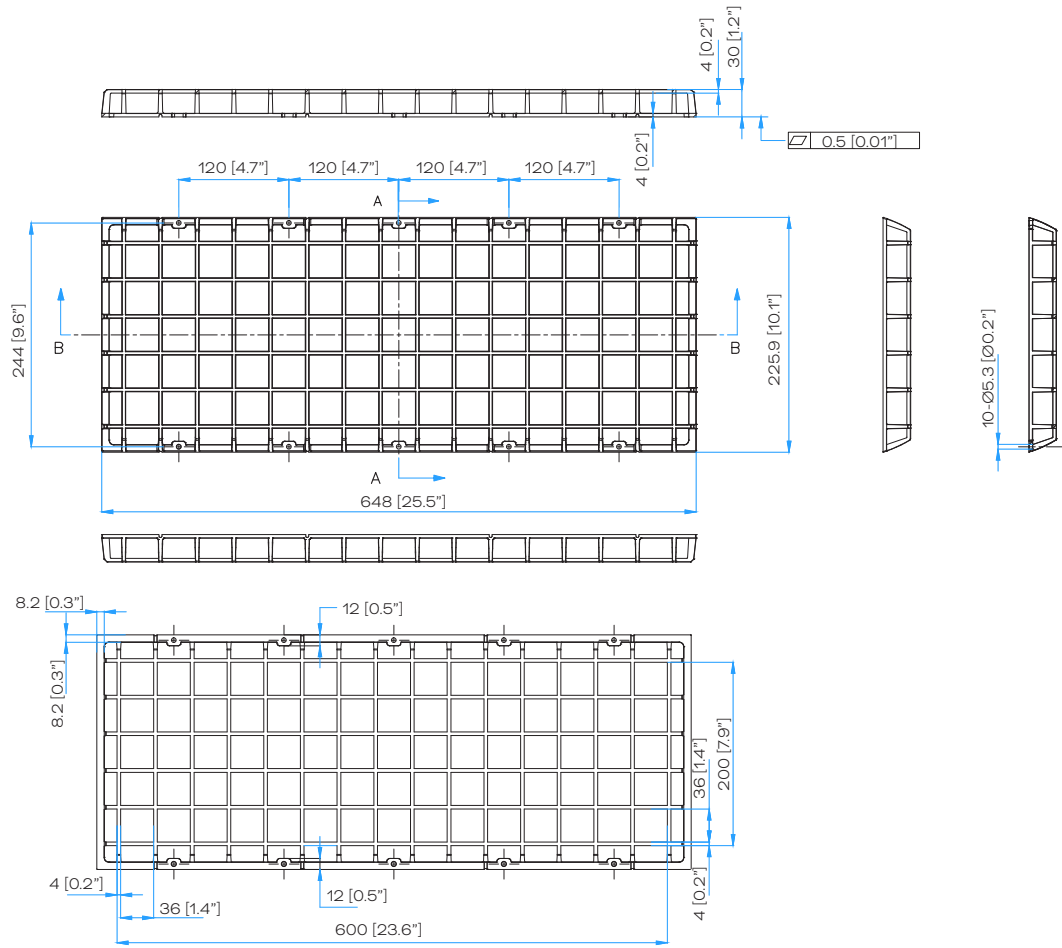

Spread Lens Module

Model No.	Description	Item Code
N/A	VISTA PLUS MAXI SPREAD MODULE 5° TX-GRAY / RAL7015 / RAL9005 / RAL9003 (1-HEAD)	DA26104884255 / AM380760055 / AM380910055 / AM381060055
N/A	VISTA PLUS MAXI SPREAD MODULE 8° TX-GRAY / RAL7015 / RAL9005 / RAL9003 (1-HEAD))	DA26104884355 / AM380770055 / AM380920055 / AM381070055
N/A	VISTA PLUS MAXI SPREAD MODULE 10° TX-GRAY / RAL7015 / RAL9005 / RAL9003 (1-HEAD)	DA26104884455 / AM380780055 / AM380930055 / AM381080055
N/A	VISTA PLUS MAXI SPREAD MODULE 15° TX-GRAY / RAL7015 / RAL9005 / RAL9003 (1-HEAD)	DA26104884555 / AM380790055 / AM380940055 / AM381090055
N/A	VISTA PLUS MAXI SPREAD MODULE 20° TX-GRAY / RAL7015 / RAL9005 / RAL9003 (1-HEAD)	DA26104884655 / AM380800055 / AM380950055 / AM381100055
N/A	VISTA PLUS MAXI SPREAD MODULE 30° TX-GRAY / RAL7015 / RAL9005 / RAL9003 (1-HEAD)	DA26104884755 / AM380810055 / AM380960055 / AM381110055
N/A	VISTA PLUS MAXI SPREAD MODULE 40° TX-GRAY / RAL7015 / RAL9005 / RAL9003 (1-HEAD)	DA26104884855 / AM380820055 / AM380970055 / AM381120055
N/A	VISTA PLUS MAXI SPREAD MODULE 55° TX-GRAY / RAL7015 / RAL9005 / RAL9003 (1-HEAD)	DA26104884955 / AM380830055 / AM380980055 / AM381130055


NOTE: Please see CAD files for additional dimensional data.

Optical Accessories

Spread Lens Module


Model No.	Description	Item Code
N/A	VISTA PLUS MAXI SPREAD MODULE 80° TX-GRAY / RAL7015 / RAL9005 / RAL9003 (1-HEAD)	DA26104885055 / AM380840055 / AM380990055 / AM381140055
N/A	VISTA PLUS MAXI SPREAD MODULE 50°X10° TX-GRAY / RAL7015 / RAL9005 / RAL9003 (1-HEAD)	DA26104885155 / AM380850055 / AM381000055 / AM381150055
N/A	VISTA PLUS MAXI SPREAD MODULE 50°X5° TX-GRAY / RAL7015 / RAL9005 / RAL9003 (1-HEAD)	DA26104885255 / AM380860055 / AM381010055 / AM381160055

Unit: mm

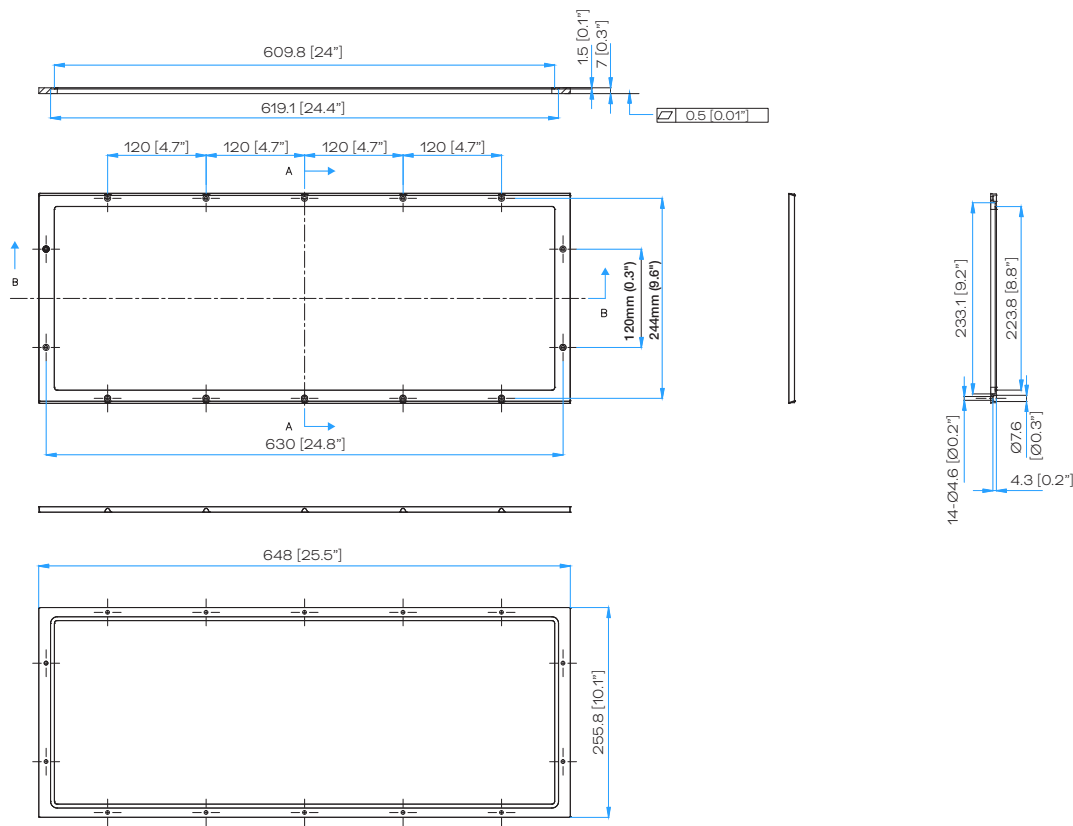

NOTE: Please see CAD files for additional dimensional data.

Wiring Diagram - 1x380W

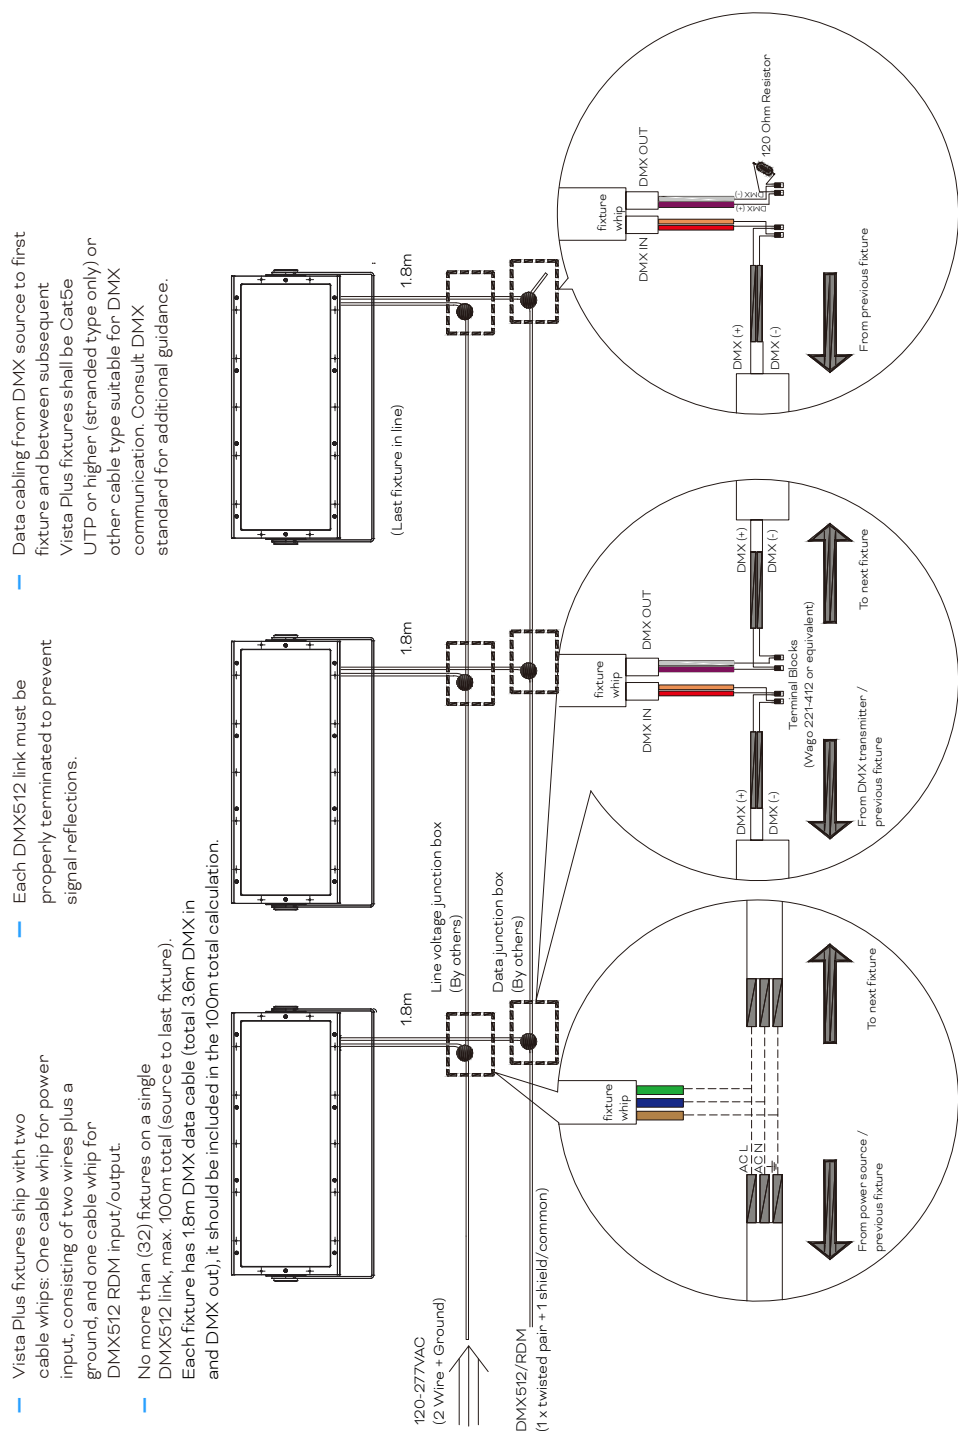


- Vista Plus fixtures ship with two cable whips: One cable whip for power input, consisting of two wires plus a ground, and one cable whip for DMX512 RDM input/output.
- No more than (32) fixtures on a single DMX512 link, max. 100m total (source to last fixture). Each fixture has 18m DMX data cable (total 36m DMX in and DMX out), it should be included in the 100m total calculation.
- Each DMX512 link must be properly terminated to prevent signal reflections.
- Data cabling from DMX source to first fixture and between subsequent Vista Plus fixtures shall be Cat5e UTP or higher (stranded type only) or other cable type suitable for DMX communication. Consult DMX standard for additional guidance.

General Notes

- All data cabling must adhere to ANSI/E11-2008 (R2013) – Entertainment Technology – USITT DMX512-A, Asynchronous Serial Digital Data Transmission Standard for Controlling Lighting Equipment and Accessories.
- Fixture is RDM compatible.
- Fixtures allow a universal input of 120V AC to 277V AC.
- Data termination shall utilize cage clamp terminal blocks, or equivalent. Wire nuts are not permissible and will void warranty.
- The method of line voltage termination, both for data and power, is at the discretion of the installing contractor, and/or engineer. Splicing and/or joining of cables must adhere to all applicable electrical codes.
- Cables must be spliced/joined in a weatherproof enclosure/junction box, which is to be properly rated and provided by others.

Wiring Diagram - 2x380W

- Vista Plus fixtures ship with two cable whips. One cable whip for power input, consisting of two wires plus a ground, and one cable whip for DMX512 RDM input/output.
- No more than (32) fixtures on a single DMX512 link, max. 100m total (source to last fixture). Each fixture has 18m DMX data cable (total 36m DMX in and DMX out), it should be included in the 100m total calculation.
- Each DMX512 link must be properly terminated to prevent signal reflections.
- Data cabling from DMX source to first fixture and between subsequent Vista Plus fixtures shall be Cat5e UTP or higher (stranded type only) or other cable type suitable for DMX communication. Consult DMX standard for additional guidance.

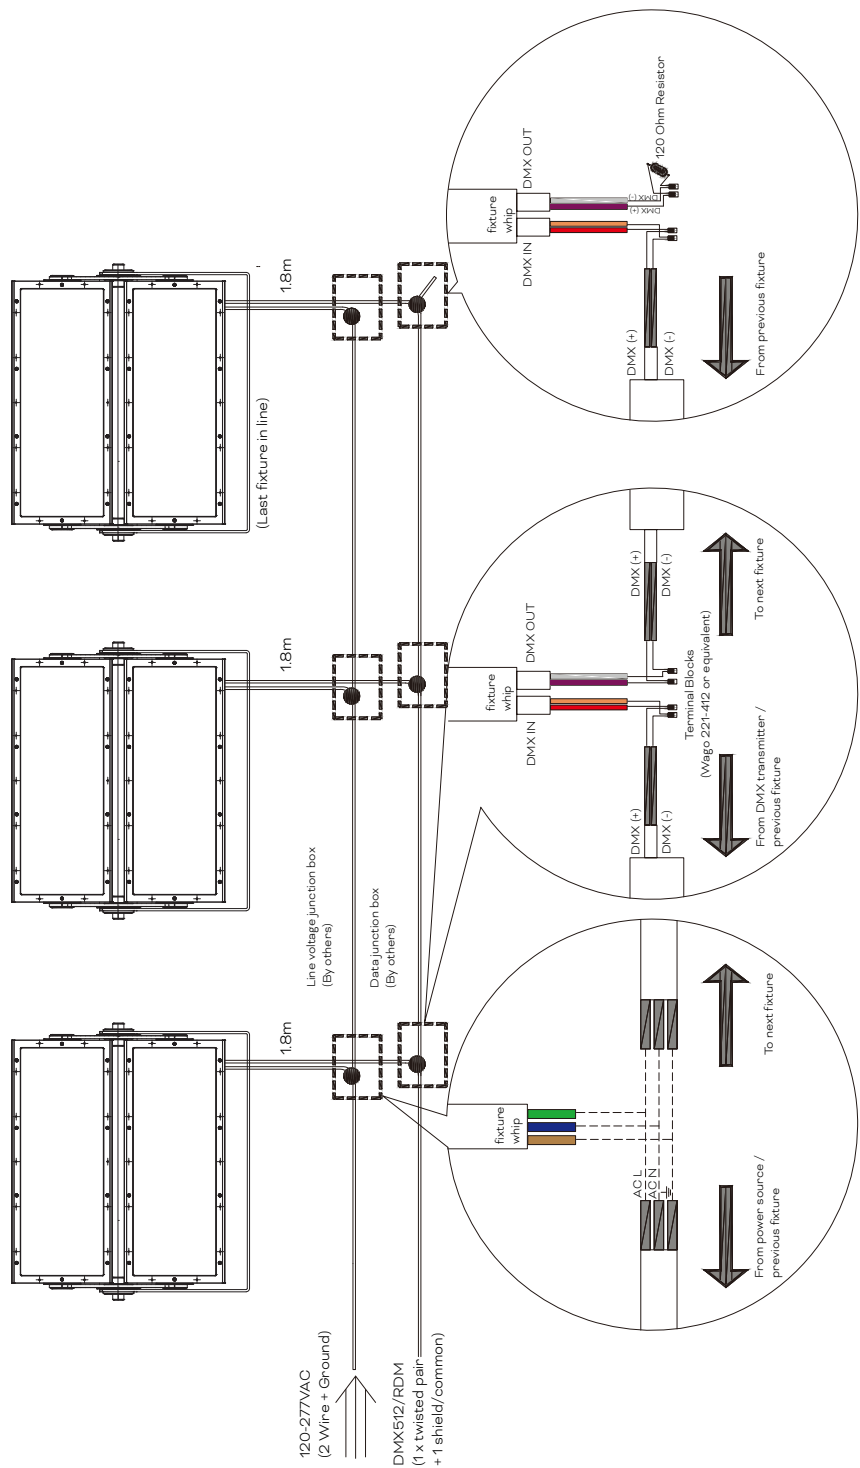

General Notes

- All data cabling must adhere to ANSI/E11.1-2008 (R2013) – Entertainment Technology – USITT DMX512-A, Asynchronous Serial Digital Data Transmission Standard for Controlling Lighting Equipment and Accessories.
- Fixture is RDM compatible.
- Fixtures allow a universal input of 120V AC to 277V AC.
- Data termination shall utilize cage clamp terminal blocks, or equivalent. Wire nuts are not permissible and will void warranty.
- The method of line voltage termination, both for data and power, is at the discretion of the installing contractor, and/or engineer. Splicing and/or joining of cables must adhere to all applicable electrical codes.
- Cables must be spliced/joined in a weatherproof enclosure/junction box, which is to be properly rated and provided by others.

Model Number Builder

VI.	PL.	N	4	2	N	N	1	1	1	1	N	0	0
		Number of Head	Wattage per head	LED	CCT	Optics	Control	Pixel	Approbation	Mounting/ Add On	Color Finish	Cable/ Connector	
		4: 1-head	4 -380W AC per Maxi head	2 - White	4 - 3000K	2 - 4°	1 - DMX/RDM	1 - 1 pixel per head	1 - CE & ETL	1 - 3G vibration	1 - TX Signature Gray (RAL7005)	0 - Standard version	
		5: 2-head			5 - 4000K	3 - 10°					2 - Gray (RAL7015)		
					6 - 5700K						3 - Black (RAL9005)		
					7 - 6500K						4 - White (RAL9003)		
					8 - DW2757 (2700K + 5700K)								
EXAMPLE VISTA PLUS MAXI 2x380W AC WHITE 3000K 4° TX-GRAY CE Model VI.PL.54242111100													
VI.	PL.	5	4	2	4	2	1	1	1	1	1	0	0

Project Model Number

VI.	PL.		4	2			1	1	1	1		0	0
-----	-----	--	---	---	--	--	---	---	---	---	--	---	---

Fixture

Model No.	Description	Item Code
VI.PL.44242111100	VISTA PLUS HO MAXI 1x380W AC 3000K 4° TX-GRAY	DL26103658455
VI.PL.44252111100	VISTA PLUS HO MAXI 1x380W AC 4000K 4° TX-GRAY	DL26103658555
VI.PL.54242111100	VISTA PLUS HO MAXI 2x380W AC 3000K 4° TX-GRAY	DL26103658955
VI.PL.54252111100	VISTA PLUS HO MAXI 2x380W AC 4000K 4° TX-GRAY	DL26103659055
VI.PL.44243111100	VISTA PLUS HO MAXI 1x380W AC 3000K 10° TX-GRAY	DL26103660955
VI.PL.44253111100	VISTA PLUS HO MAXI 1x380W AC 4000K 10° TX-GRAY	DL26103661055
VI.PL.54243111100	VISTA PLUS HO MAXI 2x380W AC 3000K 10° TX-GRAY	DL26103661455
VI.PL.54253111100	VISTA PLUS HO MAXI 2x380W AC 4000K 10° TX-GRAY	DL26103661555

Mounting Accessories

Model No.	Description	Item Code
N/A	VISTA PLUS POLE-MOUNTING SUPPORT TX-GRAY	DA26104885355
N/A	VISTA PLUS POLE-MOUNTING SUPPORT RAL7015	AM380750055
N/A	VISTA PLUS POLE-MOUNTING SUPPORT RAL9005	AM380900055
N/A	VISTA PLUS POLE-MOUNTING SUPPORT RAL9003	AM381050055
N/A	PROPOINT TERMINATION KIT	AM243520054

Optical Accessories

Model No.	Description	Item Code
N/A	VISTA PLUS MAXI HALF SHIELD TX-GRAY (1-HEAD)	DA26104883955
N/A	VISTA PLUS MAXI FULL SHIELD TX-GRAY (1-HEAD)	DA26104884055
N/A	VISTA PLUS MAXI ROCK GUARD TX-GRAY (1-HEAD)	DA26104884155
N/A	VISTA PLUS MAXI SPREAD MODULE 5° TX-GRAY (1-HEAD)	DA26104884255
N/A	VISTA PLUS MAXI SPREAD MODULE 8° TX-GRAY (1-HEAD)	DA26104884355
N/A	VISTA PLUS MAXI SPREAD MODULE 10° TX-GRAY (1-HEAD)	DA26104884455
N/A	VISTA PLUS MAXI SPREAD MODULE 15° TX-GRAY (1-HEAD)	DA26104884555
N/A	VISTA PLUS MAXI SPREAD MODULE 20° TX-GRAY (1-HEAD)	DA26104884655
N/A	VISTA PLUS MAXI SPREAD MODULE 30° TX-GRAY (1-HEAD)	DA26104884755
N/A	VISTA PLUS MAXI SPREAD MODULE 40° TX-GRAY (1-HEAD)	DA26104884855
N/A	VISTA PLUS MAXI SPREAD MODULE 55° TX-GRAY (1-HEAD)	DA26104884955
N/A	VISTA PLUS MAXI SPREAD MODULE 80° TX-GRAY (1-HEAD)	DA26104885055
N/A	VISTA PLUS MAXI SPREAD MODULE 50°X10° TX-GRAY (1-HEAD)	DA26104885155
N/A	VISTA PLUS MAXI SPREAD MODULE 50°X5° TX-GRAY (1-HEAD)	DA26104885255

Optical Accessories

Model No.	Description	Item Code
N/A	VISTA PLUS MAXI HALF SHIELD RAL7015 (1-HEAD)	AM380690055
N/A	VISTA PLUS MAXI FULL SHIELD RAL7015 (1-HEAD)	AM380720055
N/A	VISTA PLUS MAXI ROCK GUARD RAL7015 (1-HEAD)	AM380730055
N/A	VISTA PLUS MAXI SPREAD MODULE 5° RAL7015 (1-HEAD)	AM380760055
N/A	VISTA PLUS MAXI SPREAD MODULE 8° RAL7015 (1-HEAD)	AM380770055
N/A	VISTA PLUS MAXI SPREAD MODULE 10° RAL7015 (1-HEAD)	AM380780055
N/A	VISTA PLUS MAXI SPREAD MODULE 15° RAL7015 (1-HEAD)	AM380790055
N/A	VISTA PLUS MAXI SPREAD MODULE 20° RAL7015 (1-HEAD)	AM380800055
N/A	VISTA PLUS MAXI SPREAD MODULE 30° RAL7015 (1-HEAD)	AM380810055
N/A	VISTA PLUS MAXI SPREAD MODULE 40° RAL7015 (1-HEAD)	AM380820055
N/A	VISTA PLUS MAXI SPREAD MODULE 55° RAL7015 (1-HEAD)	AM380830055
N/A	VISTA PLUS MAXI SPREAD MODULE 80° RAL7015 (1-HEAD)	AM380840055
N/A	VISTA PLUS MAXI SPREAD MODULE 50°X10° RAL7015 (1-HEAD)	AM380850055
N/A	VISTA PLUS MAXI SPREAD MODULE 50°X5° RAL7015 (1-HEAD)	AM380860055
N/A	VISTA PLUS MAXI HALF SHIELD RAL9005 (1-HEAD)	AM380870055
N/A	VISTA PLUS MAXI FULL SHIELD RAL9005 (1-HEAD)	AM380880055
N/A	VISTA PLUS MAXI ROCK GUARD RAL9005 (1-HEAD)	AM380890055
N/A	VISTA PLUS MAXI SPREAD MODULE 5° RAL9005 (1-HEAD)	AM380910055
N/A	VISTA PLUS MAXI SPREAD MODULE 8° RAL9005 (1-HEAD)	AM380920055
N/A	VISTA PLUS MAXI SPREAD MODULE 10° RAL9005 (1-HEAD)	AM380930055
N/A	VISTA PLUS MAXI SPREAD MODULE 15° RAL9005 (1-HEAD)	AM380940055
N/A	VISTA PLUS MAXI SPREAD MODULE 20° RAL9005 (1-HEAD)	AM380950055
N/A	VISTA PLUS MAXI SPREAD MODULE 30° RAL9005 (1-HEAD)	AM380960055
N/A	VISTA PLUS MAXI SPREAD MODULE 40° RAL9005 (1-HEAD)	AM380970055
N/A	VISTA PLUS MAXI SPREAD MODULE 55° RAL9005 (1-HEAD)	AM380980055
N/A	VISTA PLUS MAXI SPREAD MODULE 80° RAL9005 (1-HEAD)	AM380990055
N/A	VISTA PLUS MAXI SPREAD MODULE 50°X10° RAL9005 (1-HEAD)	AM381000055
N/A	VISTA PLUS MAXI SPREAD MODULE 50°X5° RAL9005 (1-HEAD)	AM381010055
N/A	VISTA PLUS MAXI HALF SHIELD RAL9003 (1-HEAD)	AM381020055
N/A	VISTA PLUS MAXI FULL SHIELD RAL9003 (1-HEAD)	AM381030055
N/A	VISTA PLUS MAXI ROCK GUARD RAL9003 (1-HEAD)	AM381040055
N/A	VISTA PLUS MAXI SPREAD MODULE 5° RAL9003 (1-HEAD)	AM381060055
N/A	VISTA PLUS MAXI SPREAD MODULE 8° RAL9003 (1-HEAD)	AM381070055
N/A	VISTA PLUS MAXI SPREAD MODULE 10° RAL9003 (1-HEAD)	AM381080055
N/A	VISTA PLUS MAXI SPREAD MODULE 15° RAL9003 (1-HEAD)	AM381090055
N/A	VISTA PLUS MAXI SPREAD MODULE 20° RAL9003 (1-HEAD)	AM381100055
N/A	VISTA PLUS MAXI SPREAD MODULE 30° RAL9003 (1-HEAD)	AM381110055
N/A	VISTA PLUS MAXI SPREAD MODULE 40° RAL9003 (1-HEAD)	AM381120055
N/A	VISTA PLUS MAXI SPREAD MODULE 55° RAL9003 (1-HEAD)	AM381130055
N/A	VISTA PLUS MAXI SPREAD MODULE 80° RAL9003 (1-HEAD)	AM381140055
N/A	VISTA PLUS MAXI SPREAD MODULE 50°X10° RAL9003 (1-HEAD)	AM381150055
N/A	VISTA PLUS MAXI SPREAD MODULE 50°X5° RAL9003 (1-HEAD)	AM381160055
Note: Vista Plus 200W accessory is suitable for Vista Plus Maxi / Vista Plus HO Maxi.		



TRAXON | ecue

MEMBER OF PROSPERITY GROUP

www.traxon-ecue.com