

Butler PRO e:pix



Butler PRO e:pix

The e:cue Butler PRO e:pix is an e:net to e:pix interface for the e:cue Lighting Application Suite (LAS). It controls up to 16 e:pix universes with 2,048 channels per universe. Connection to the server runs via Ethernet interface with 100 MBit/s. All cabling, Ethernet and e:pix, uses CAT5 RJ45 connections. Using a LC display with 2 lines by 20 characters, all basic configurations can be done with the set of four cursor keys and an OK key. When online, the LC display shows status messages from the Butler PRO e:pix. The Butler PRO e:pix is the optimal interface for running huge numbers of e:pix universes. The system is installed in standard 19-inch racks.

Main features

- Controls up to 32,768 e:pix channels in 16 e:pix universes
- Basic configuration via LC display and cursor keys
- Display of status messages while operating
- 100 MBit system interconnect for e:net over Ethernet

Delivery scope

- Butler PRO e:pix
- Rack mounting brackets
- Power chords DE, US, UK
- Welcome note

Item code

AA628610035

e:cue Server

Designed to control large and complex projects, our Lighting Engines are high-performance servers with pre-installed SYMPHOLIGHT and the Lighting Application Suite (LAS) software. As central control unit, this versatile server guarantees uninterrupted operation as it orchestrates all devices and fixtures within a project. e:cue Server Range is scalable to cover any project requirements.

Product specifications



Dimensions (W x H x D)	482 x 44 x 142 mm / 19 x 1.7 x 5.6 in (incl. mounting brackets)
Weight	1.2 kg / 2.65 lbs
Power supply input	100 ... 240 V AC, 50/60 Hz
Power consumption	max. 20 W
Operating temperature	0 ... 40 °C / 32 ... 104 °F
Storage temperature	-20 ... 70 °C / -4 ... 158 °F
Op. / storage humidity	0 ... 80% RH, non-condensing
Protection class	IP20
Housing	Steel, front powder coated
Mounting	in 19-inch standard racks
Certificates	CE, ETL, UKCA

Interface specifications

Outputs	16 e:pix ports galvanically isolated (2 ports/isle) for 1 kV RJ45 receptacle connector Traxon pin configuration
System link	1 x e:net (RJ45)
User interfaces	4 + 1 cursor keys, LC display
Display	2 x 20 characters LCD display

Dimensions (in mm)

All dimensions in mm

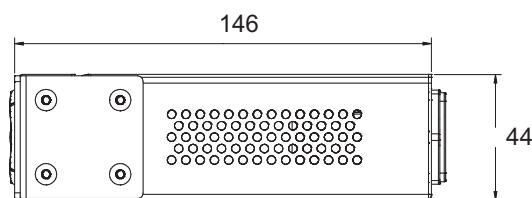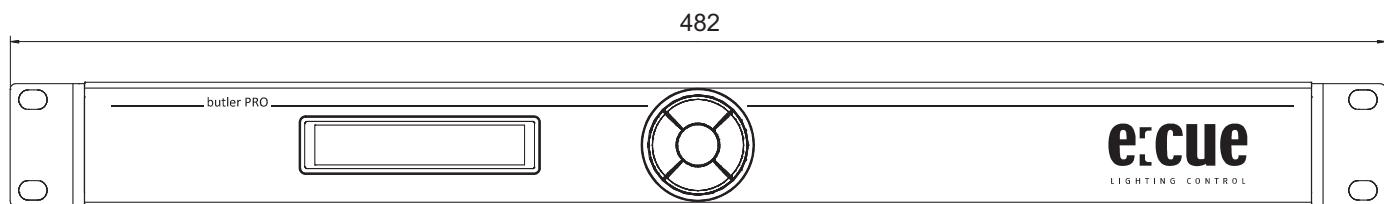

Conforms to ANSI/UL Std. 62368-1
Certified to CSA Std. C22.2 NO. 62368-1