


Cable A Outside Ø10-14mm H07RN-F 3G 2.5mm ² (CE) SJTW 3C AWG13 (UL)	Cable B Outside Ø10-14mm H07RN-F 5G 2.5mm ² (CE) SJTW 5C AWG13 (UL)
Use Traxon accessory parts to ensure installation compatibility. Failure to do so can void the warranty.	

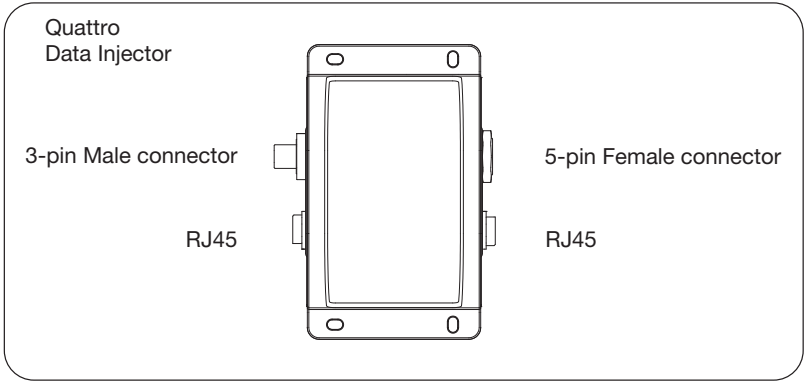

Fixture daisy chain per Data Injector:

Fixture	Voltage	Max. number of fixtures
1ft	120-127V ETL	47
	220-240V CE	128
	277V ETL	128
2ft	120-127V ETL	32
	220-240V CE	86
	277V ETL	105
3ft	120-127V ETL	28
	220-240V CE	62
	277V ETL	76
4ft	120-127V ETL	23
	220-240V CE	47
	277V ETL	57

Max. number of fixtures is based on minimal interconnection lengths between Data Injector-to-Fixture and Fixture-to-Fixture.
Actual number of fixtures is dependent on cable interconnection lengths. Number of fixtures will reduce if longer cable lengths are used. Please consult regional sales office to confirm maximums.

