

Our Brands

traxon **escue**

OSRAM



ProPoint™ Sconce

Grazing luminaire for exterior architectural features.










The ProPoint Sconce series is an AC line powered luminaire controllable via DMX512 with built in Remote Device Management (RDM), or also available in on/off for more simple installation where control is not required. The system is connected using a daisy chain topology with separate power and data cables for easy and cost efficient installation.


The ProPoint Sconce series offers a complete portfolio of solutions in 3000K and 4000K White and Red, Green, and Blue as standard options. Each is available in three sizes with a 10° x 5° beam angle that is designed to project the beam on the surface. Choose from our three standard finishes – Gray, Black, and White – or contact Traxon for your own custom RAL color.

Designed for form and function, the ProPoint Sconce series offers a tight, controlled grazing solution to exterior applications where the light source will be visible. The sleek design works in both traditional and contemporary architectural environments, and is ideal for façades looking to elegantly illuminate pathways, columns and other architectural features.

Technical Specifications & Options

| | White | | Red | | Green | | Blue | |
|--------------------------|--|------------|---|----------|---|----------|---|----------|
| COLOR | <div><div>3000K Warm White</div><div>4000K Neutral White</div></div> | |  | |  | |  | |
| TECHNICAL SPECIFICATIONS | | | | | | | | |
| | LUMINOUS FLUX | EFFICACY | LUMINOUS FLUX | EFFICACY | LUMINOUS FLUX | EFFICACY | LUMINOUS FLUX | EFFICACY |
| S | 280-299 | 31-33 lm/W | 173 | 23 lm/W | 210 | 23 lm/W | 113 | 12 lm/W |
| M | 463-520 | 35-39 lm/W | 271 | 25 lm/W | 343 | 25 lm/W | 175 | 13 lm/W |
| L | 815-879 | 36-39 lm/W | 483 | 27 lm/W | 590 | 26 lm/W | 318 | 14 lm/W |
| BEAM ANGLE | 10° x 5° | | | | | | | |
| ENVIRONMENT | <div>IP66Suitable for Coastal Environment</div> | | | | | | | |
| CERTIFICATIONS | cETLus, CE, FCC, RoHS, REACH, ASTM B117-16, ANSI 3G, IK08 | | | | | | | |
| INPUT VOLTAGE | 120-277V _{AC} 50/60Hz | | | | | | | |
| OPERATING TEMPERATURE | -30°C to +55°C / -22°F to +131°F | | | | | | | |
| POWER FACTOR | ≥ 0.9 | | | | | | | |
| CONTROL | DMX512 RDM Enabled or On/Off | | | | | | | |

Dimensions

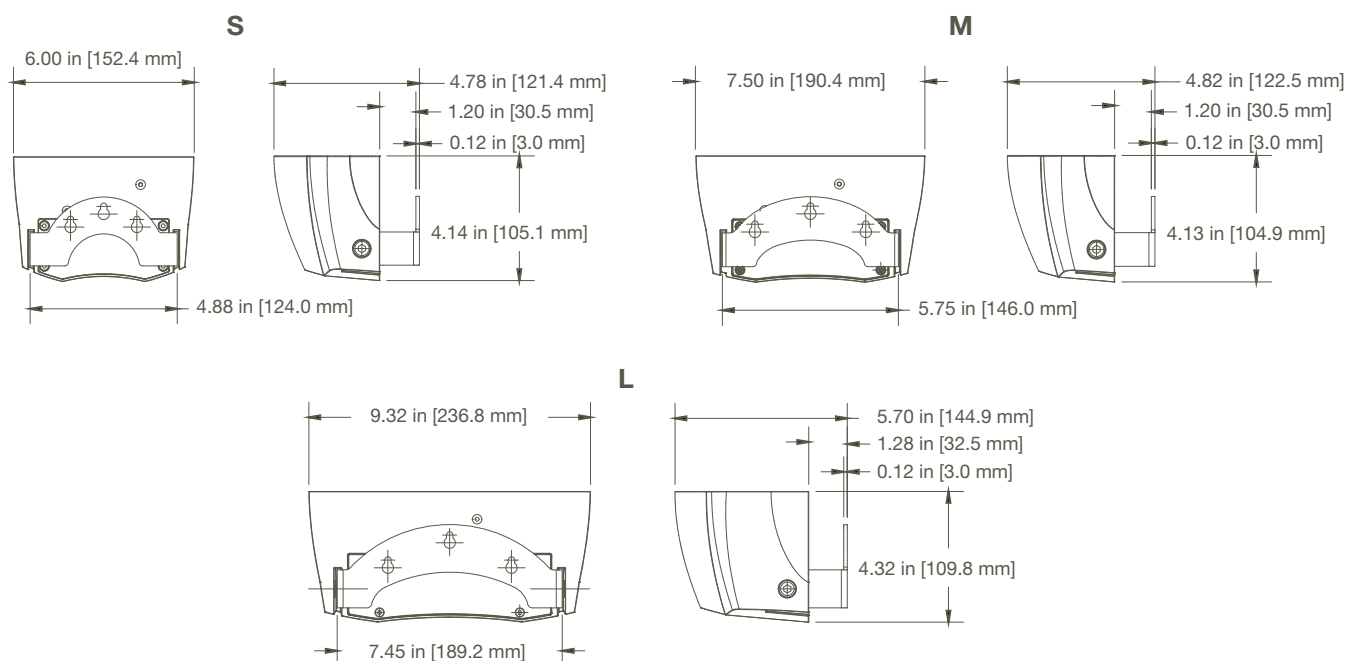

Body Finishes:



Gray (RAL 7015)



Black (RAL 9005)



White (RAL 9003)

Our Brands

traxon **e:cue**

www.traxontechnologies.com
www.osram.us/traxon

© 2021 TRAXON TECHNOLOGIES - AN OSRAM BUSINESS. ALL RIGHTS RESERVED. TRAXON™ AND TX CONNECT® ARE TRADEMARKS OF TRAXON TECHNOLOGIES.
 U.S. PATENTS, E.U. PATENTS, JAPAN PATENTS, OTHER PATENTS PENDING. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

OSRAM