




TRAXON







ProPoint™ Kontour

A highlighting linear façade luminaire delivering even radiance and long runs

The ProPoint™ Kontour series is an AC line powered dynamic accent luminaire designed to outline or highlight facades, walls, architectural borders and bridges. It is controllable via DMX512 and connected using a Data Injector which combines power and data into one simple daisy chain topology. Designed for maximum efficiency, the product achieves long run lengths of 1000ft / 305m on a single white power/data run at 277V¹. The ProPoint™ Kontour series offers a complete portfolio of solutions in RGBW, RGB, White, and single saturated colors with a diffused flat lens, or a rounded diffused lens. Designed for form and function, Kontour is available in 4 lengths to simplify installation and reduce costs – 1' / 300mm, 2' / 600mm, 4' / 1200mm, and 8' / 2400mm. ProPoint™ Kontour is also available in 2 widths – Narrow (1.8" / 46.5mm) at 4W per foot and Wide (3" / 75mm) at 5W per foot, giving design teams a greater arsenal to meet their vision. Kontour can be ordered in different resolutions and can be controlled either as 1PXL or multi-pixels, depending on project needs. The RGBW comes in full color RGB plus a 4000K white for color changing effects. White comes in 3000K and 4000K standard CCT, as well as 2200K, 2700K, 3500K, 5700K, 6500K, Red, Green, Blue, and Amber². All are available in 3 standard finishes – Gray RAL 7015, Black RAL 9005 and White RAL 9003. Traxon's ProPoint™ Kontour provides best in class linear highlighting performance with even radiance across the entire surface.



Technical Specifications & Options

	RGBW	RGB	White
COLOR			  2200K, 2700K, 3500K, 5000K, 6500K, Red, Green, Blue, Amber available ²

TECHNICAL SPECIFICATIONS

Length	Width	Power Consumption	LUMINOUS FLUX		EFFICACY		LUMINOUS FLUX				EFFICACY									
			Flat	Round	Flat	Round	3000K		4000K		Flat	Round								
							Flat	Round	Flat	Round										
300mm (12")		4W	123lm	123lm			75lm	75lm			362lm	354lm	381lm	378lm						
600mm (24")	Narrow 46.5mm (1.8")	8W	246lm	247lm	29lm/W	28lm/W	131lm	149lm	17lm/W	18lm/W	678lm	708lm	712lm	760lm	84lm/W	86lm/W				
1200mm (48")		16W	495lm	479lm			298lm	298lm			1365lm	1434lm	1461lm	1510lm	90lm/W	93lm/W	(3000K)	(3000K)	(4000K)	(4000K)
2400mm (96")		32W	985lm	986lm			596lm	596lm			2790lm	2832lm	2935lm	3017lm						
300mm (12")		5W	165lm	173lm			98lm	102lm			454lm	460lm	461lm	481lm						
600mm (24")	Wide 75mm (3")	10W	330lm	347lm	31lm/W	32lm/W	197lm	205lm	19lm/W	20lm/W	911lm	922lm	923lm	964lm	88lm/W	lm/W				
1200mm (48")		20W	646lm	648lm			365lm	410lm			1774lm	1793lm	1849lm	1891lm	93lm/W	lm/W	(3000K)	(3000K)	(4000K)	(4000K)
2400mm (96")		40W	1329lm	1383lm			795lm	817lm			3637lm	3681lm	3701lm	3783lm						

BEAM ANGLE		
	Diffused Flat	Diffused Round

ENVIRONMENT	 
	IP66 Suitable for Coastal Environment

CERTIFICATIONS	cETLus or CE, FCC, RoHS, ASTM B117-16, ANSI C136.31 3G Vibration Rating, IK08 (in narrow size), IK07 (in wide size)
----------------	---

INPUT VOLTAGE	120-277V _{AC} 50/60Hz
---------------	--------------------------------

OPERATING TEMPERATURE	-30°C to +55°C / -22°F to +131°F
-----------------------	----------------------------------

POWER FACTOR	≥ 0.9
--------------	-------

CONTROL	DMX512
---------	--------

- 1000ft / 305m run at 277V possible with the Kontour Narrow (4W per foot). Please refer to Specification Sheet and Installation Guide for detailed daisy chain run lengths."
- No MOQ required. Please consult regional sales office for pricing and lead time.

Body Finishes:



Gray (RAL 7015)




Black (RAL 9005)




White (RAL 9003)




Dimensions - ProPoint Kontour Narrow Diffused Flat

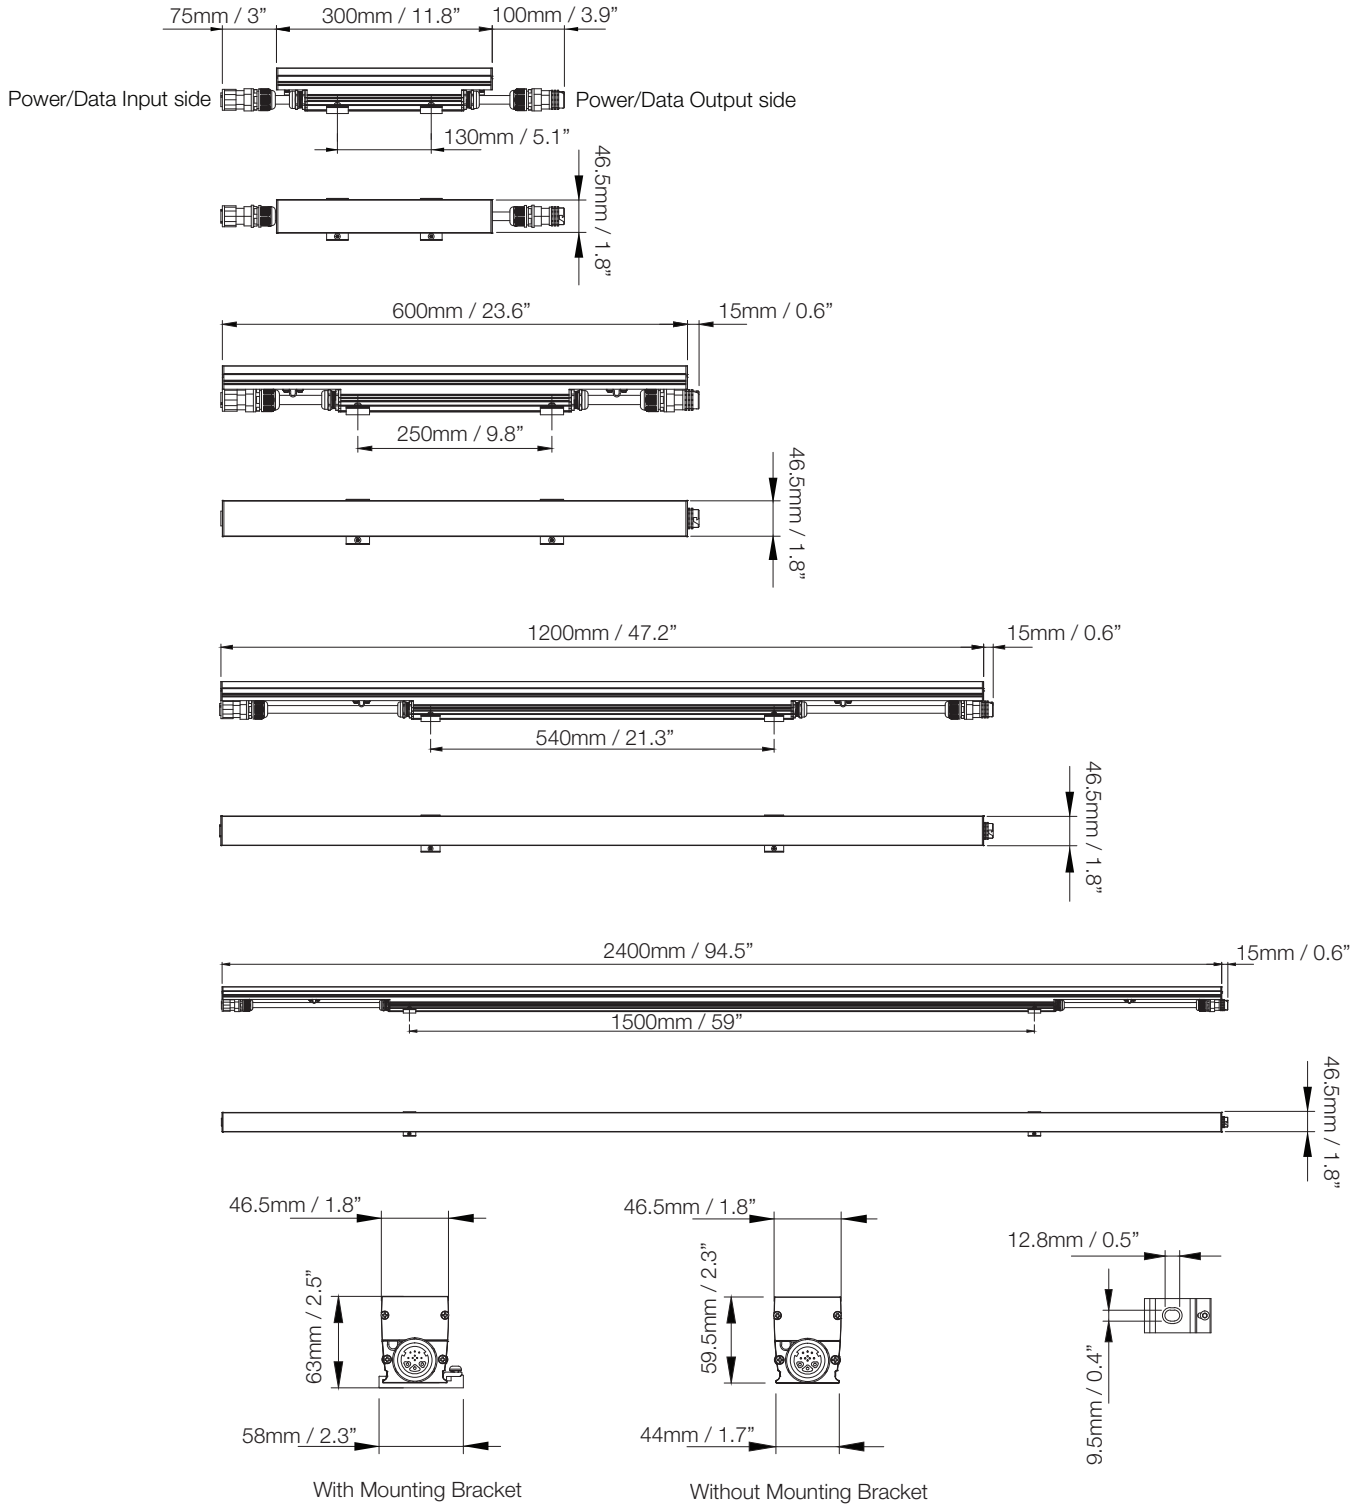

Dimensions - ProPoint Kontour Wide Diffused Flat

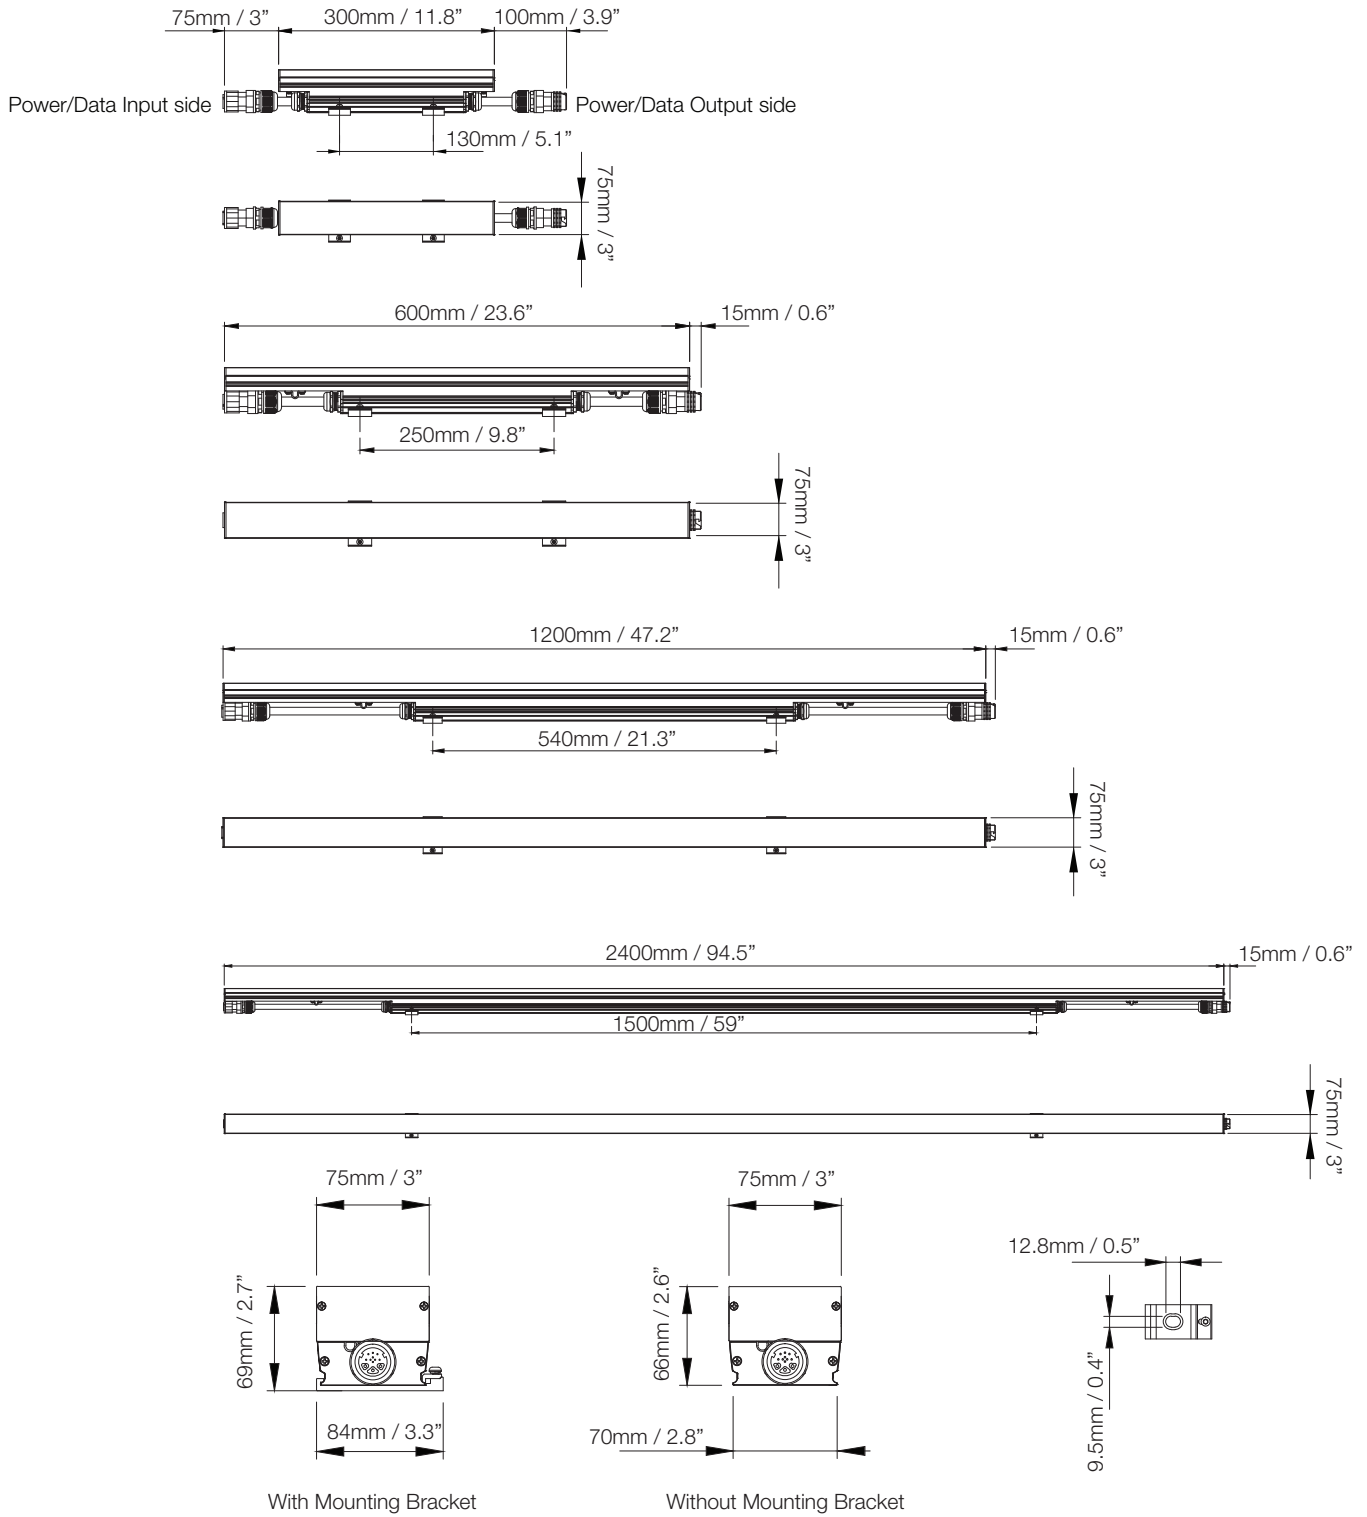

Dimensions - ProPoint Kontour Narrow Diffused Round

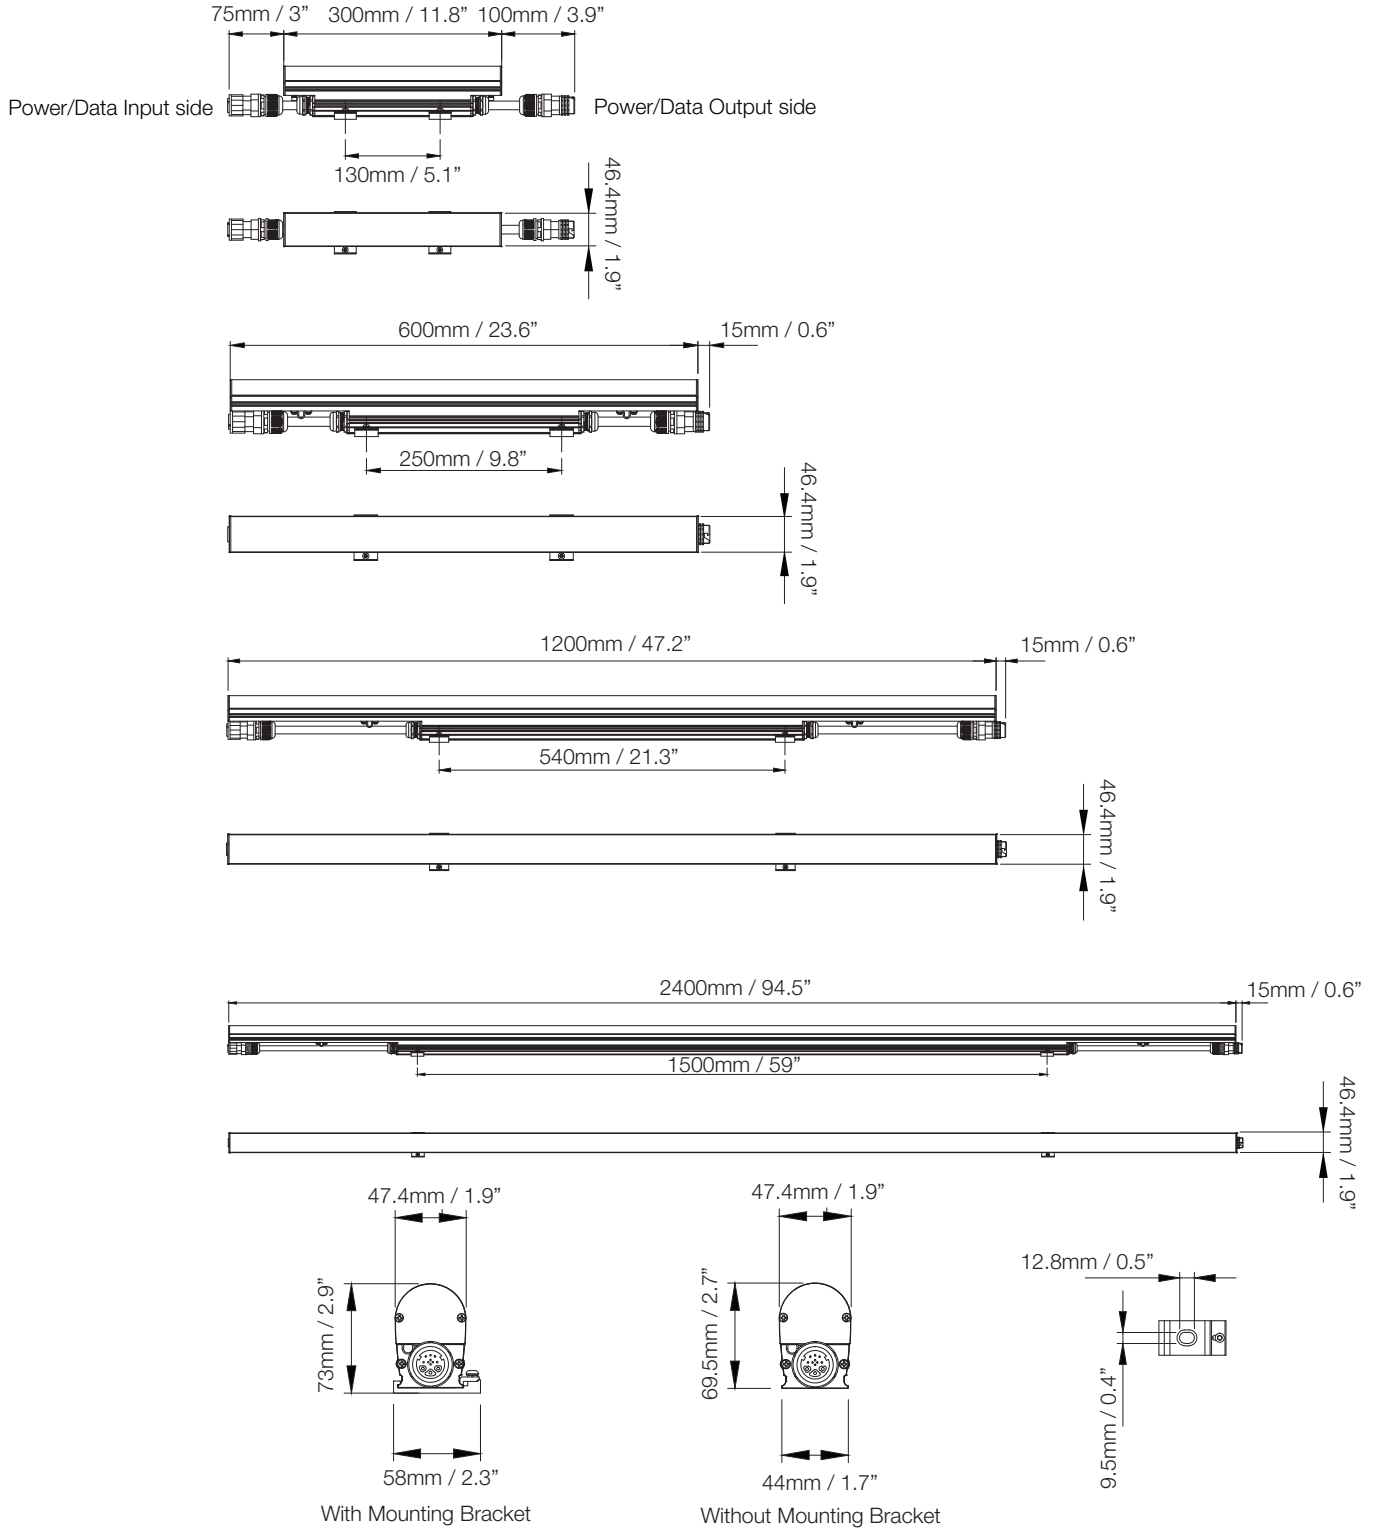

Dimensions - ProPoint Kontour Wide Diffused Round

