
# Media Tube® Plus A slim luminaire designed to integrate into any wall, facade or media lighting application TRAXON Plus<sup>+</sup> Product Highlights: Available in 5 lengths\* Diffused view and direct view e:pix / DMX512 Daisy Chain System with quick lock connectors Auto-Addressing per daisy-chain or manual-addressing with TX Addresser IP66, Suitable for Coastal Environment, IKO9 and 3G Vibration Resistant. Create Medium Resolution graphics or dynamic borders eccue MEMBER OF PROSPERITY GROUP



## Introducing the Media Tube® Plus

Our newest and brightest mixed-resolution tube family.

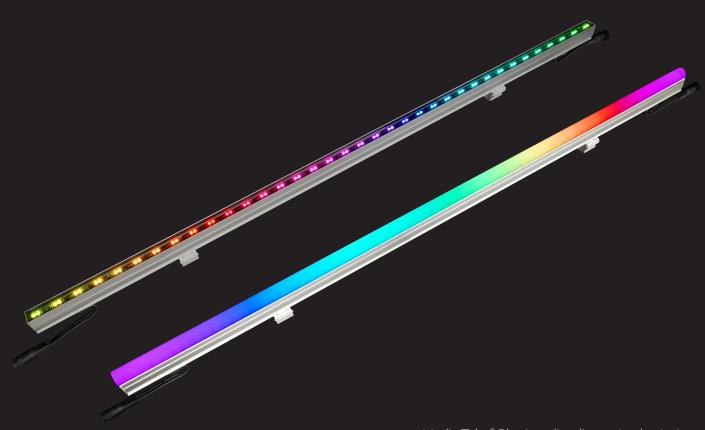

Media Tube® Plus is a slim, direct view luminaire designed to integrate into any wall, facade or media lighting application with tight installation requirements. Available with a Direct View or Diffused View lens and 9 pixels per 300mm / 1', Media Tube® Plus provides smooth effects to add life and motion to the installation. Featuring Auto-Addressing and simple quick-lock connections, Media Tube® Plus is perfect for building façades, media applications, and more.

### Features

- Available lengths\*: 296mm / 1ft (9PXL), 596mm / 2ft (18PXL), 896mm / 3ft (27PXL), 1196mm / 4ft (36PXL) and 1496mm / 5ft (45PXL)
- Available in full resolution or customized Pixel Configurations
- Simple installation using the Mounting Brackets and Flat Cable Whips
- Daisy Chain System with quick lock connectors
- IP66 and Suitable for Coastal Environments
- IK09 Impact Rated and ANSI 3G Vibration Rated for installation in harsh environments


### Applications

- Accent/border dynamic effect
- Medium-resolution media facades
- Stadiums, Bridges, Hospitality, Office Buildings

	Direct View					Diffused View				
Length*	296mm/12"	596mm/23"	896mm/35"	1196mm/47"	1496mm/59"	296mm/12"	596mm/23"	896mm/35"	1196mm/47"	1496mm/59"
lm (RGBW)	232	435	655	877	1100	185	349	529	714	903
lm (RGB)	134	254	384	515	647	102	195	297	403	512
Pixels	9	18	27	36	45	9	18	27	36	45
Housing	Extruded Aluminum									
IP rating	Outdoor, IP66, Suitable for Coastal Environment									
Operating Temperature	40°C to +60°C / -40°F to +140°F									
Addressing	Auto-Addressing per daisy-chain or Manual-addressing with TX Addresser									
Control	e:pix / DMX 512									

\*Length options differ by region. See your local Traxon representative for information



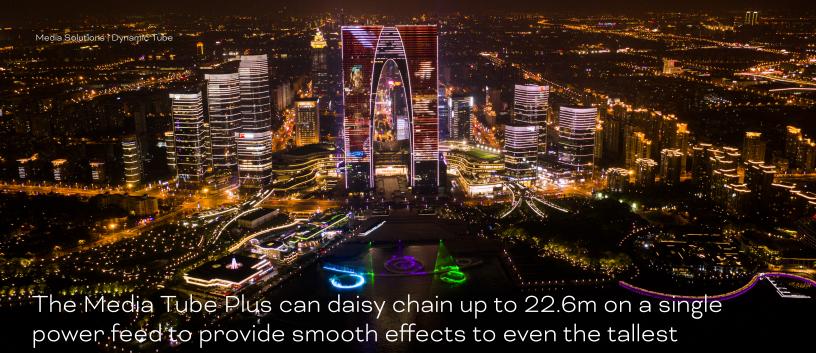

#### **Cable Connection**

buildings.

Flat cable whip enables simple connections and adjustable distance between fixtures.





