


Pin 1	DMX-
Pin 2	DMX+
Pin 3	GND

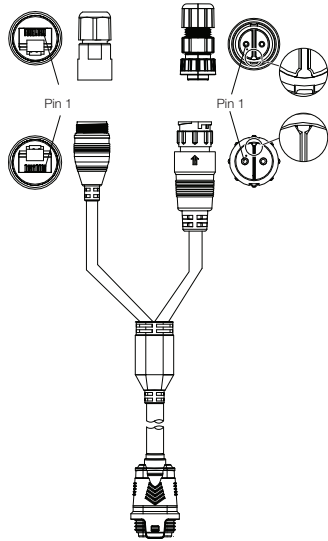

**1** Cable OD: Ø3 – 6mm  
Strip CAT5 cable (coating remain)  
Outdoor cable specification:  
CAT-5e UTP/FTP  
PVC jacket; UV resistant  
Outer diameter 3-6mm, filled type  
(The warranty will void if in use cable is not follow the specification of outdoor cable)

**2** Run cable through connector

**3** Crimp connector onto cable  
Tighten Sealing Nut temporary

**4** Plug RJ45 until "click" sound is heard

**5** Tightening Torque: 0.7 – 0.9Nm  
Tighten Clamp Ring

**6** Tightening Torque: 0.7 – 0.9Nm  
Tighten Sealing Nut

Pin 1	V+
Pin 2	V-

**1** Cable OD: Ø8 – 10mm  
Cable type: H07RN-F 2 X 1.5 mm sq

**2** Run cable through connector  
Tightening Torque: 0.6 – 0.8Nm  
Tighten cable onto screw terminals

**3** Tightening Torque: 0.7 – 0.9Nm  
Tighten Clamp Ring

**4** Tightening Torque: 0.7 – 0.9Nm  
Tighten Sealing Nut

**5** Push both connectors onto each other

**6** Turn Lock Nut clockwise for half cycle to lock

Pin 1	V+
Pin 2	V-

**1** Cable OD: Ø8 – 10mm  
Cable type: H07RN-F 2 X 1.5 mm sq

**2** Run cable through connector  
Tightening Torque: 0.6 – 0.8Nm  
Tighten cable onto screw terminals

**3** Tightening Torque: 0.7 – 0.9Nm  
Tighten Clamp Ring

**4** Tightening Torque: 0.7 – 0.9Nm  
Tighten Sealing Nut

**5** Push both connectors onto each other

**6** Turn Lock Nut clockwise for half cycle to lock

