


AM477840055
MT PLUS RJ45 PWR INJ CABLE KIT

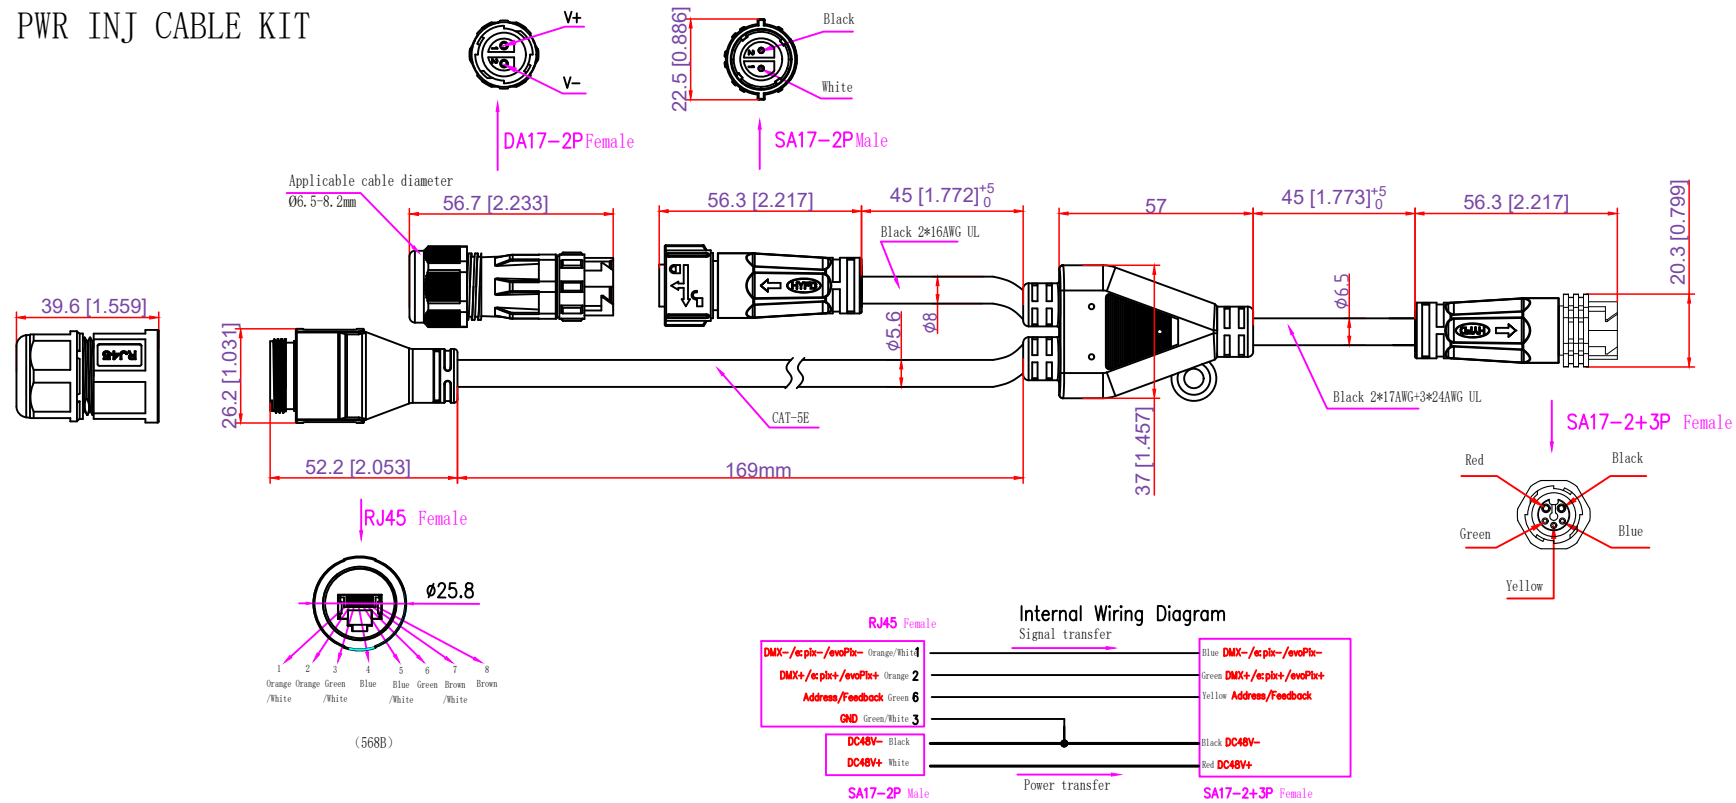

技术参数
TECHNICAL PARAMETER
额定电压: 125V DC
Voltage rating: 125V DC
额定电流: 8+3A(SA17-2+3P); 8A(SA17-2P); 3A(RJ45)
Current rating: 8+3A(SA17-2+3P); 8A(SA17-2P); 3A(RJ45)
接触电阻: ≤10mΩ(SA17-2+3P/SA17-2P); ≤20mΩ(RJ45)
Contact resistance: ≤10mΩ(SA17-2+3P/SA17-2P); ≤20mΩ(RJ45)
绝缘电阻: ≥500MΩ(SA17-2+3P/SA17-2P); ≥100MΩ(RJ45)
Insulation resistance: ≥500MΩ(SA17-2+3P/SA17-2P); ≥100MΩ(RJ45)
抗电强度: 500V AC/min(SA17-2+3P/SA17-2P); 100V AC/min(RJ45)
Dielectric strength: 500V AC/min(SA17-2+3P/SA17-2P); 100V AC/min(RJ45)
防护级别: IP67
Ingress Protection: IP67
符合ROHS要求
Compliance with ROHS

TRAXON | e:cue

Product Name: MT PLUS RJ45 PWR INJ CABLE KIT		Project Name: -----			
Product Part Number: -----		Drawing Title: -----			
Traxon Technologies and e:cue Lighting Control reserves the right to make changes to this information at any time. All of the information contained in these drawings is diagrammatic in nature and is not to be used for construction. Refer to applicable architectural and engineering drawings for fixture placement, wire and conduit paths, junction box placements, etc.		Location: Traxon ShenZhen			Date: 24.06.03
		Drawing Notes			
		Scale: ----			

